

My Net[™] N600, N750, and N900 Routers

User Manual



WD® Service and Support

Should you encounter a problem, please give us an opportunity to address it before returning this product. Most technical support questions can be answered through our knowledge base or e-mail support service at *http://support.wdc.com*. If the answer is not available or, if you prefer, please contact WD at the best telephone number shown below.

Your product includes 30 days of free telephone support during the warranty period. This 30-day period starts on the date of your first telephone contact with WD technical support. E-mail support is free for the entire warranty period and our extensive knowledge base is available 24/7. To help us keep you informed of new features and services, remember to register your product online at *http://register.wdc.com*.

Accessing Online Support

Visit our product support website at *http://support.wdc.com* and choose from these topics:

- Downloads Download drivers, software, and updates for your WD product.
- **Registration** Register your WD product to get the latest updates and special offers.
- Warranty & RMA Services Get Warranty, Product Replacement (RMA), RMA Status, and Data Recovery Information.
- Knowledge Base Search by keyword, phrase, or answer ID.
- **Installation** Get online installation help for your WD product or software.
- WD Community Share your thoughts and connect with other users.

Contacting WD Technical Support

When contacting WD for support, have your WD product serial number, system hardware, and system software versions available.

North America	As	ia Pacific	
English	855-842-5370	Australia	1 800 42 9861
		China	800 820 6682/+65 62430496
Spanish	800.832.4778	Hong Kong	+800 6008 6008
		India	1 800 11 9393 (MNTL)/1 800 200 5789 (Reliance) 011 26384700 (Pilot Line)
Europe (toll free)*	00800 ASK4 WDEU	Indonesia	+803 852 9439
	(00800 27549338)	Japan	00 531 650442
		Korea	02 703 6550
Europe	+31 880062100	Malaysia	+800 6008 6008/1 800 88 1908/+65 62430496
Middle East	+31 880062100	Philippines	1 800 1441 0159
Africa	+31 880062100	Singapore	+800 6008 6008/+800 608 6008/+65 62430496
		Taiwan	+800 6008 6008/+65 62430496

* Toll free number available in the following countries: Austria, Belgium, Denmark, France, Germany, Ireland, Italy, Netherlands, Norway, Spain, Sweden, Switzerland, United Kingdom.

Table of Contents

	$WD^{\mathbb{R}}$ Service and Support	2
1	Important User Information	1
	Important Safety Instructions	1
	Recording Your WD Product Information	2
	Registering Your WD Product	2
2	Product Overview	3
	Features	3
	Package Contents	5
	Components	6
3	Getting Started	10
	Installing the Router on the Network	10
	Using the Setup CD	10
	Using a Browser for Setup (Windows or Mac)	
	Installing WD Software from the CD (Optional)	18
4	Basic Settings and Tasks	20
	Opening My Dashboard After Setup	20
	Understanding My Dashboard	21
	Connecting to the Internet	
	Configuring Wireless Settings	
	Setting Up External Storage	
	Adding a Device	21
5	Advanced Settings	30
	Typical Advanced Settings Screen	
	Advanced WAN (Internet) Category	
	Advanced Wireless Category	36

	Advanced LAN Category 38
	Security Settings Category 42
	Additional Features Category
	Admin Category 50
;	Performing Advanced Tasks55
	Enabling Guest Access 55
	Setting Up Parental Controls 56
	Changing the Administrator's Password
	Accessing Files Stored on an Attached USB Drive
	Updating the Router's Firmware
	Restoring the Router to Factory Defaults
	Rebooting the Router 67
	Using the Router as an Access Point
	Configuring UPnP 71
	Enabling Port Forwarding 71
	Accessing My Net View 73
	Installing and Using WD Print Share
3	Troubleshooting76
9	Regulatory and Warranty Information
	Regulatory Compliance
	Warranty Information (All Regions Except Australia/New Zealand). 82
	Warranty Information (Australia/New Zealand only)
	GNU General Public License ("GPL")
	Appendix: Technical Specifications

Important User Information

Important Safety Instructions

This device is designed and manufactured to assure personal safety. Improper use can result in electric shock or fire hazard. The safeguards incorporated into this unit will protect you if you observe the following instructions for installation, use, and servicing.

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments/accessories specified by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Carefully read and follow the Quick Install Guide and User Manual.
- Do not operate this device outside the temperature range of 5°C–35°C (41°F–95°F).
- Do not drop or shake the device.
- Do not move the device when it is powered on.
- Power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon them or against them.
- Do not overload wall outlets.

For additional safety information, refer to www.wdc.com.

Recording Your WD Product Information

In the following table, write the serial and model numbers of your new WD product. You can find this information on the label on the bottom of the device. You should also note the date of purchase. This information may be required when requesting technical support.

Serial Number:

Model Number:

Purchase Date:

System and Software Notes:

Registering Your WD Product

Your WD product includes 30 days of free technical support during the applicable warranty period for your product. The 30-day period commences on the date of your first telephone contact with WD technical support. Register your WD product online at *http://register.wdc.com*.



Product Overview

Thank you for purchasing the My Net[™] router. This user manual provides step-by-step instructions for installing and using your new router. For the latest WD product information and news, visit our website at <u>www.wdc.com</u>.

This chapter contains the following topics:

Features Package Contents Components Getting Started

Features

The WD My Net dual band routers (My Net N600, N750, and N900 Pro) look similar, their user interfaces are similar, and they work in much the same way. The table below summarizes the features that are different are different.

Feature	My Net N600	My Net N750	My Net N900
Wireless speed ¹	300 Mbps + 300 Mbps	300 Mbps + 450 Mbps	450 Mbps + 450 Mbps
Wired speed	10/100 Fast Ethernet	10/100/1000 Gigabit Ethernet	10/100/1000 Gigabit Ethernet
USB ports	(1) USB 2.0	(2) USB 2.0	(2) USB 2.0
Ethernet ports	(4) RJ45	(4) RJ45	(7) RJ45
WMM QoS	\checkmark	\checkmark	\checkmark
FasTrack™	\checkmark	✓	x
FasTrack Plus	x	x	\checkmark

Note: For detailed technical specifications, see "Appendix: Technical Specifications" on page 85.

The following features are common to all of the routers unless specified otherwise.

Easy Setup (for Windows Computers) – Installation software that connects your router and sets up Wi-Fi security, creating a secure wireless home network.

Simultaneous dual band speed¹ – Enables you to enjoy smooth, uninterrupted video streaming and online gaming.

Wired speed – For My Net N600 and N750 routers, connect up to four Ethernet-enabled devices for fast wired speed within your network. For My Net N900 routers, connect up to seven such devices.

Maximum wireless performance rate derived from IEEE standard 802.11 specifications. Actual data throughput and wireless coverage may vary based on wireless network capacity, data throughput rate, range and coverage. Performance depends on factors including distance from the access point, volume of network traffic, building materials and construction, operating system used, configuration of wireless products used, interference and other adverse conditions.

Exclusive FasTrack™ and FasTrack Plus technology – Instantly detect entertainment traffic and deliver smart real-time prioritization for smooth HD streaming to your smart TV, tablet, smartphone, computers, and other Wi-Fi connected devices.

Plug USB storage and printers into your router – Gives you the flexibility to add storage and share files as well as to connect a printer and print from any computer within your network.

DLNA/UPnP media server – An external hard drive connected to a USB port on the My Net router can be used to stream photos, video, and music to any media client on the network.

Internet Security and Parental Controls – Use this feature to block web sites or content based on your preferences.

Guest access – Set up guest access to allow others to use your Internet connection without joining your personal network. While guests will have access to the Internet, they will not have access to your personal files or local resources such as printers.

WPS (Wi-Fi Protected Setup™) security – Use the one-touch WPS button on your router to establish a secure connection between the My Net router and other WPS-enabled Wi-Fi devices such as tablets and notebook computers.

Keep your network up and running – The included network diagnostics tool monitors your network for you. It shows how many devices are on your network, continually analyzes common network connectivity issues and helps correct them when they occur so you are back up and running quickly.

Advanced settings – Users who want to customize and have control over their router can use the Advanced Settings module on the router's internal My Dashboard user interface.

Additional software – The product CD provides additional software:

- WD Quick View runs in the background on your computer and notifies you of important warnings or events on the network. For example, it opens the My Dashboard interface, shows network attached storage status, and opens the public share of an attached USB storage device.
- WD Print Share enables users to share a printer connected to a USB port on the My Net router.
- My Net View diagnoses and detects any issue within the network and recommends ways to address the issue. WD Customer Service also uses this software to get necessary information to support customers with network issues.

Package Contents

In addition to your router, the package contains:

- Network (Ethernet) cable
- AC Power adapter
- Setup CD containing setup software, additional software, and product documentation
- Quick Install Guide on the CD cover



Accessories

For U.S. residents, visit *www.shopwd.com* to view additional accessories available for your My Net router. For users outside the U.S., visit *http://support.wdc.com*.

AC Power Adapters


The AC power adapter varies, depending on your location. Some locations do not require a power plug clip. Units sold in those locations will have a fixed power plug. Refer to the illustrations below.



Components

Front Panel

The front panels of the My Net N600, My Net N750, and My Net N900 routers are identical.

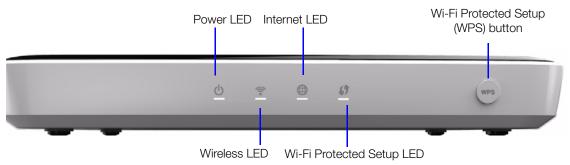

Front panel LED indicators

LED	Description
Power	Steady when the router is powered on and operational; flashes slowly during bootup, firmware upgrades, and system self-tests.
Wireless	Lit when wireless connection is active.
Internet	Lit when Internet connection is active.
Wi-Fi Protected Setup (WPS)	 When connecting the router and a wireless device (e.g., a printer) that you want to add to the network, the LED indicates the status of WPS: When WPS is connecting a network device, the light blinks slowly. If an error occurs during setup, the light blinks quickly.
	After setup, light is solid when WPS is active.

Front button


Button	Description
WPS (Wi-Fi Protected Setup) button	Enables you to configure Wi-Fi security on WPS-enabled devices.


Back Panel

The back panels of the three My Net router models are similar except for the number of USB and Ethernet ports.

My Net N600 router

Link LED (Green)

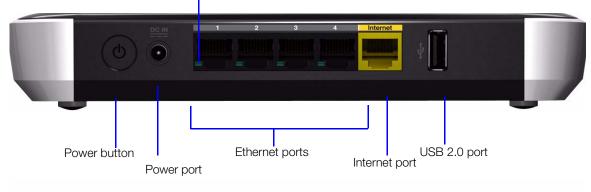

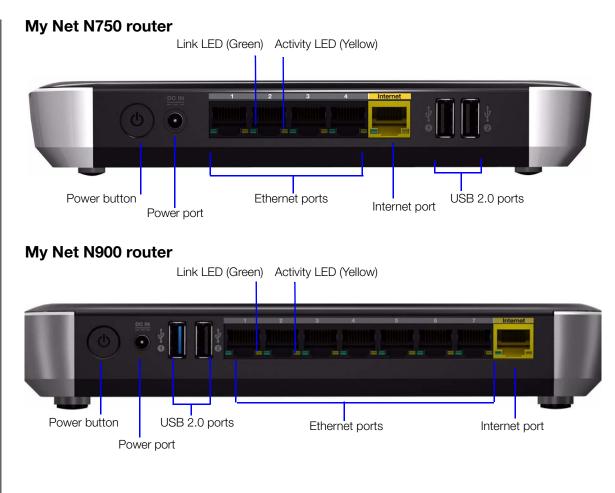

Component	How to use
Internet (WAN) port (yellow)	Use an Ethernet (network) cable to connect this port to a modem.
Ethernet (LAN) ports	Use Ethernet (network) cables to connect wired network devices to these ports.
Power port	Use the included AC power adapter to connect this port to the power source.
Power button	Press to turn on the router. Press again to turn off the router.
USB 2.0 port(s)	Connect storage devices such as the WD Passport or a printer to your network so you can share files and resources.

Port LEDS

Component	LED	Description
Ethernet ports	Link LED (Green)	Steady on when a cable connects the port to a network device's Ethernet port.
	Activity LED (Yellow)	Blinks to indicate network activity on that Ethernet port.
Internet port	Link LED (Green)	On when a cable connects the port to the modem.
	Activity LED (Yellow)	Blinks to indicate network activity on that port.

Bottom (not shown)

Component	Description
Reset button	To reset your My Net router to factory defaults, press and hold the Reset button for at least 10 seconds. When the reset starts, the Power LED blinks.



Getting Started

This chapter contains the following topics:

Installing the Router on the Network Using the Setup CD Using a Browser for Setup (Windows or Mac) Installing WD Software from the CD (Optional)

Installing the Router on the Network

Two methods install the My Net router on your network:

- Setup CD The Easy Setup utility for Windows discovers and installs the router on the network. Use the utility to configure the Internet connection, wireless network, and install additional WD software.
- Browser Mac users must use a web browser to set up the router. Windows users may also use a web browser to set up the router.

Using the Setup CD

Starting Easy Setup (Windows)

Windows XP

- 1. Insert the Setup CD into your computer's CD/DVD drive.
 - If AutoRun (AutoPlay) is enabled, the Choose your setup option screen displays.
 - If AutoRun (AutoPlay) is disabled, click Start > My Computer and locate the My Net router CD drive under Devices with Removable Storage. Double-click the CD, and then double-click EasySetup.exe to display the Choose your setup option screen.
- 2. Continue to "Setting up a New Router" on page 11.

Windows Vista/Windows 7

- 1. Insert the Setup CD into your computer's CD/DVD drive.
- 2. If a dialog box displays, click **Run EasySetup.exe**:

AutoPlay
DVD RW Drive (D:) My Net Router
Always do this for software and games:
Install or run program from your media
Kun EasySetup.exe
General options
Open folder to view files using Windows Explorer
View more AutoPlay options in Control Panel

3. If a dialog box does not display, click **Start** or 🚱 > **Computer** and locate the My Net router CD drive under **Devices with Removable Storage**.

- 4. Double-click the CD, and then double-click **EasySetup.exe** to display the Choose your setup option screen.
- 5. Continue to "Setting up a New Router" below.


Setting up a New Router

My Net [™] Setup	English (United States)
Choose your setup option.	
	Set up a new router
Skip and go to software installation	
About User Manual	


1. On the Choose your setup option screen, click **Set up a new router**. A screen showing a connected router appears:



2. Make sure that your router is connected properly and click Confirm.

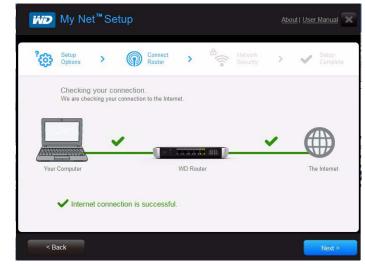


- 3. The utility checks your connection to the router and the Internet. When both connections are confirmed, click **Next.**
- 4. Follow the instructions in the Easy Setup wizard for configuring the router's wireless settings:

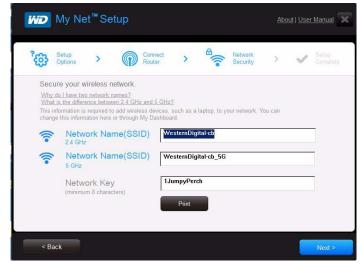

5. Click **Print** to make a hard copy of the Wireless network settings.

6. Click **Next** to complete the router's wireless settings.

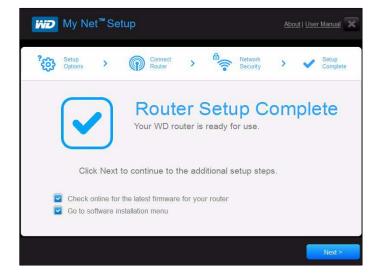

- 7. On the Setup Complete screen, do one of the following:
 - a. Check online for the latest firmware for your router or go to the software installation menu and select the appropriate check box(es).
 - *Note:* For more information on these processes, see "Updating the Router's Firmware" on page 66 and "Installing WD Software from the CD (Optional)" on page 18.
 - b. To use or configure the router without selecting the other options, clear the check boxes and click **Next**.

Note: You can install the software from the Setup CD and update the firmware from the My Dashboard user interface at any time.

8. Register your router to receive software notifications and customer support. Enter your name, email address, and click **Register**:

Set	up Complete		
	ur My Net [™] router.		
First Name	ce to receive software notifica	Fmail Address	
			Register
[]		100	Programm

9. To configure additional router settings, continue with "Basic Settings and Tasks" on page 20.

Using a Browser for Setup (Windows or Mac)


To connect a Mac computer to a My Net router you must use a browser.

Note: Windows users can set up the router using a browser instead of Easy Setup.

The initial physical connection may be wired, as described in "Connecting the Router Physically" below, or wireless, as described in "Connecting to the Router Wirelessly (WD SSID)" on page 15.

Connecting the Router Physically

While the installation wizards for the router lead you through the steps for physically connecting the router, this section is for users who want more specific information and for those who simply want to connect the router and start using it.

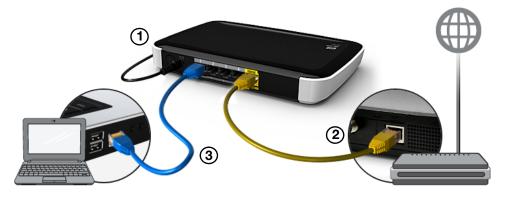

- 1. Connect the power cable to the router's DC connector and into an AC power outlet. Press the **On/Off** button on the back of the router once to turn it on. The four LEDs on the front panel of the router light up one by one as it boots up.
- 2. Connect the included yellow Internet (Ethernet) cable to the router's Internet port and the the modem.

Note: One Ethernet (network) cable is included in the product package. You can purchase additional cables from the WD Store or another source.

- 3. Using Ethernet cables, connect network devices or computers to the router's unused Ethernet ports.
- 4. Continue to "Configuring a New Router" on page 15.

Connecting to the Router Wirelessly (WD SSID)

If you are using a desktop computer with a wireless card or a laptop computer with wireless capability, you can connect wirelessly to the router immediately. The same is true of mobile wireless devices with Wi-Fi enabled.



- 1. Make sure your computer's Wi-Fi is turned on.
- 2. Select the network **WesternDigital** from the list of wireless networks on the computer's or device's screen, and connect. By default there is no password. Continue to Configuring a New Router, below.

Configuring a New Router

- 1. Open a browser. (See requirements in "Appendix: Technical Specifications" on page 85.)
- 2. In the address field, type **http://wdrouter** or **http://192.168.1.1**. The Welcome screen displays:



3. Click **Continue** to display the first Connect to Internet screen.



4. Make sure that your router is connected properly and click **Confirm**.



- 5. When both connections are confirmed, click **Next**.
- 6. Follow the installation wizard's instructions.

7. When the Set up Wireless screen displays, you can change the Network Name (SSID) and Security Mode for more protection. (See "Configuring Wireless Settings" on page 24 for more information.)

Wireless 2.4Ghz	On		Wireless 5Ghz	On	
Network Name (SSID)	WesternDigital	2	Network Name (SSID)	WesternDigital	
Security Mode	None		Security Mode	None	
Channel Width	20 MHz	-	Channel Width	20/40 MHz(Auto)	
Channel	Auto		Channel	Auto	

Note: If you do so, you will have to connect your computer or wireless device to the new SSID.

- 8. Click Save.
- 9. Complete the installation wizard, including installing WD Software (optional). For more information, see "Installing WD Software from the CD (Optional)" on page 18.
- 10. Click **Finish**. The My Dashboard home screen displays.

Welcome to My Net N750 Router		Firmware Version 1.00.28	You have 5 notification(s)	
	li.		ණු .	
My Dashboard Connect to Internet Set up W	Vireless	Set up Storage Add a D	evice Advanced Sett	
Network SSID(2.4GHz) WesternDigital	5	Media Network SSID(5GHz)	WesternDigital	_
Pass Key (none)		Media Pass Key	(none) 🕥	
Device Name MyNetN750	$\mathbf{\Sigma}$	Attached Storage		-115
		USB Port2	Attached 🕟	
Internet Status Connected				
Number of Devices 2 Connected	>		4-1 Q+1	
Guest SSID WesternDigital_guest	>	Internet Security and Paren Status	Disabled	
Guest Pass Key (none)				
	B 14	anced Settings		

Note: To configure your router, continue with "Basic Settings and Tasks" on page 20.

Installing WD Software from the CD (Optional)

Easy Setup (Windows)

Use Easy Setup to install additional WD software on a Windows computer at any time.

- 1. Start Easy Setup as described in "Using the Setup CD" on page 10.
- 2. On the Choose your setup option screen, click **Skip and go to software installation**. A list of available software applications displays:

WD Print Share O Share your printer in the network Symptotic Wiew O Monitor router status	e network			oftware to install	ect so
WD Quick View O Monitor router status		Share your printer in the netw	0	WD Print Share	0
		Monitor router status	0	WD Quick View	6
V 🚱 My Net View 🕥 Installed		Installed	0	My Net View	0
MS .NET Framework 3.5 O Installed		Installed	0	MS .NET Framework 3.5	

- 3. Click the check boxes for the software you want to install and click **Next**.
 - Note: For information about WD Quick View, see "Using WD Quick View (Windows or Mac)" on page 63. For information about WD Print Share, see "Installing and Using WD Print Share" on page 74. For information about My Net View, see "Accessing My Net View" on page 73.
- 4. Complete the wizards to install the software, and then click Finish.

My Net Software (Mac)

Use My Net Setup on the Setup CD to install WD Printshare and WD Quick View on a Mac computer.


1. Insert the Setup CD into the CD drive of your Mac computer to display the Welcome to the My Net Setup Installer screen.

000	🥮 Install My Net Setup
	Welcome to the My Net Setup Installer
Introduction License Destination Select	You will be guided through the steps necessary to install this software.
 Installation Type Installation Summary 	
	Go Back Continue

Note: As you follow the steps in the wizard, they appear in bold letters in the list on the left

00	Install My Net Setup
	Standard Install on "Macintosh HD"
 Introduction License Destination Select 	This will take 15.3 MB of space on your computer.
Installation Type Installation Summary	Click Install to perform a standard installation of this software on the disk "Macintosh HD".
	Change Install Location Customize Go Back Install

- 2. Click **Continue** to display the Standard Install on "Macintosh HD" screen, which provides several options:
 - To change the where the applications should be installed, click **Change Install Location**.
 - To customize the installation, click **Customize** and select the applications you want to install.
 - To perform a standard installation of WD Quick View and WD Print Share, click Install.
 - *Note:* For information about WD Quick View, see "Using WD Quick View (Windows or Mac)" on page 63. For information about WD Print Share, see "Installing and Using WD Print Share" on page 74.



Basic Settings and Tasks

This chapter contains the following topics:

Opening My Dashboard After Setup Understanding My Dashboard Opening My Dashboard After Setup Connecting to the Internet Configuring Wireless Settings Setting Up External Storage Adding a Device

Opening My Dashboard After Setup

To open the My Net router dashboard after initial configuration:

1. Enter **http://wdrouter** or **http://192.168.1.1** in the address field of your browser. The Welcome screen displays.

WD
Welcome, please sign in
User Name
Password
Fassword
Submit

2. Enter the router's username (default value is **admin**) and password (default value is lowercase **password**) and click **Submit**. The My Dashboard home screen displays:

5	names and inspections and the second second	
5		
	Media Network SSID(5GHz) WesternDigital-cb_5G	
	Media Pass Key 7YellowBass	
>	Attached Storage	
	USB Port2 Attached	
	Internet Security and Parental Control	
	Status Enabled	>
		Attached Storage USB Pon2 Attached Internet Security and Parental Control

MY NET ROUTERS USER MANUAL

Understanding My Dashboard

Basic Dashboard Icons

The icons at the top of the screen open modules and wizards for performing important tasks. The red **Alert** icon at the upper right of the screen displays notices concerning the router.

lcon	Name	Actions	See
	My Dashboard	Review and change current settings.	"Basic Settings and Tasks" on page 20
	Connect to Internet	Connect the router to the Internet and follow the wizard through the process of setting up the Internet connection.	"Connecting to the Internet" on page 23
(Set up Wireless	Configure wireless settings such as network name and security.	"Configuring Wireless Settings" on page 24
669	Set up Storage	Follow the wizard guiding you through setting up a storage device connected to the USB port of the router.	"Setting Up External Storage" on page 25
+	Add a Device	Add a wireless device and configure its security settings.	"Adding a Device" on page 27
හි	Advanced Settings	Configure advanced settings for Internet connections, wireless connections, storage, devices, system administration, security, and the local network (LAN) settings.	"Advanced Settings" on page 30
\triangle	Alert	Click to display recent alerts about new firmware and network issues and shortcuts to important settings.	



The My Dashboard's home screen is a simple snapshot of the router's configuration with the most essential information in one screen. It includes summary information for wireless settings, Internet status, guest network, parental control, and attached hard drive(s).

My Dashboard Conne	ct to Internet Set up Wi	reless	Set up Storage Add a Device Advanced Settings
ம் My Dashboard			
Network SSID(2.4GHz)	WesternDigital-cb	>	Media Network SSID(5GHz) WesternDigital-cb_5G
Pass Key	7YellowBass	>	Media Pass Key 7YellowBass
Device Name	MyNetN750	>	Attached Storage
			USB Port2 Attached
Internet Status	Connected	>	
Number of Devices Connected	2	>	
-			Internet Security and Parental Control
Guest SSID	WesternDigital_guest	>	Status Enabled
Guest Pass Key	(none)		

1. Review the following settings on the My Dashboard home page. If you used Easy Setup, you may have changed the settings from the defaults already. If not, you can change them here.

Setting	Description
Network SSID (2.4 GHz)	Unique identifier of the 2.4 GHz network.
Pass Key	Password for accessing the 2.4 GHz network.
Device Name	Name assigned to the router.
Internet Status	Router is Connected to or Disconnected from the Internet.
Number of Devices Connected	Number of devices connected to the router.
Guest SSID	To provide guests with limited access to the Internet, you can create a guest network. The guest network is disabled by default.
Guest Pass Key	Password for accessing the guest network.
Media Network SSID (5 GHz)	Unique identifier of the 5 GHz network. This network is generally used for media and smart devices because it minimizes interference that might interrupt media streaming.
Media Pass Key	Password for accessing the 5 GHz network.

Setting	Description
Attached Storage	Status of a storage device connected to the router's USB port.
Internet Security and Parental Control status	If status is Enabled, this feature controls access to the Internet by restricting dangerous or undesirable web access. Disabled by default. See "Setting Up Parental Controls" on page 56.

2. To change a setting, click the arrow to the right of the setting to display another screen or a list of options.

Connecting to the Internet

To check or troubleshoot your Internet connection:

1. Click the **Connect to Internet** icon to display a diagram showing you how to connect the router cables.



- 2. Click **Next**. A screen displays the status of the connections: from the computer to the router and from the router to the Internet.
- 3. When a connection succeeds, a check mark displays above it.
 - a. Click **Next** to display the Congratulations screen.
 - b. Click **Finished** to display the My Dashboard home page again.
- 4. If the connection to the Internet fails:
 - a. Click **Next** and enter your Internet service provider account **PPPoE Username** and **Password**.
 - b. Click **Next** to display the My Dashboard home page again.



Once you configure wireless settings on the router, you can easily connect wireless devices such as notebooks, laptops, tablets, PDAs, or smart phones to the Internet and to other devices on the network.



To configure basic wireless settings:

1. Click the **Set Up Wireless** icon at the top of the page. The Set Up Wireless screen displays.

			දියි
My Dashboard Conne Set up Wireless	ect to Internet Set up Wireless	Set up Storage Add a D	
Wireless 2.4Ghz	On william	Wireless 5Ghz	On
Network Name (SSID)	WesternDigital	Network Name (SSID)	WesternDigital
Security Mode	WPA/WPA2 - Personal	Security Mode	None
Network Key	abcdef123	Channel Width	20/40 MHz(Auto)
Channel Width	20 MHz 🕑	Channel	Auto
Channel	Auto		
		1	Cancel
			Cancel Save

2. View or modify the required wireless settings for the 2.4 GHz network and the 5 GHz network.

Note: You can change some settings on this screen. See "Advanced Wireless Category" on page 36 for additional wireless settings.

Setting	Description
On/Off	Wireless service is enabled by default. To disable, toggle to the Off setting.
Network Name (SSID)	Name given to the wireless network.

Setting	Description
Security Mode	Type of security applied to the wireless network. The default is WPA-Personal/WPA2-Personal.
	 WPA (Wi-Fi Protected Access) and WPA2 are security protocols that use a dynamically changing key. WPA2 is the second generation protocol that uses stronger AES (Advanced Encryption Standard) encryption. The third option is None. WPA/WPA2 mixed security mode provides better compatibility with legacy devices. However, for better performance and connectivity, WPA2 security mode is highly recommended.
Network Key	Password for accessing the wireless network.
Channel Width	The default setting is 20/40 MHz (Auto) for the 5 GHz band, This setting is recommended unless you have connectivity issues. The other option is 20 MHz for the 5 GHz band.
	The default setting is 20 MHz for the 2.4 GHz band. The other option is 20/40 MHz (Auto) for the 2.4 GHz band.
Channel	Accept the default (Auto), or select a channel from the drop- down list.

3. Click Save.

Setting Up External Storage 🤶

You can modify storage settings such as network shares for USB storage device(s) attached to the router.

- 1. Make sure the storage device is properly connected to the router's USB port.
- 2. Click the **Set Up Storage** icon to display the first screen of the storage wizard.



3. Click **Next** to display a list of connected storage devices.

Advanced	Settings		× Close	9			
° (° 🛜 🖬	<u>]→</u> □	0	•)	ද ්දියි	ዶ
Storage / St	torage						
Storage	Share function	n for storage.					
Safety Remove	Select the share fun	ction for storage and	setup the account i	ind password			
	Storage	Share	DLNA	iTunes	FTP		
	USB1						
	Hide						
	Storage Po	ort		Device name			
	USB1		WD.	My Passport 0	748		
	Storage acces						
	Public Shar						
		e: wd user					

4. Select the device you want to set up and click **Next** to display the Step 3. Share function for storage screen.

Note: If the storage device is locked, enter the device's password as prompted.

Step 3. Share function for storage. Select the share function for storage and setup the account and password. Select the share function for storage USB1 Set up access permission for storage Public Share User Account Username Vd_USer Password:		to Internet S	Set up Wireless	Set up Storag	de Add a Di	evice Advanced Setti
Select the share function for storage and setup the account and password. Storage Share DLNA iTunes FTP USB1 Image: Comparison of the storage Image: Comparison of the storage Set up access permission for storage Public Share User Account Username Image: Comparison of the storage						
USB1 V V V Set up access permission for storage Public Share User Account Username wd_user				int and password.		
Set up access permission for storage Public Share User Account Username wd_user		Storage	Share	DLNA	iTunes	FTP
Public Share User Account Username: wd_user		USB1				
Public Share User Account Username: wd_user	Set up access	permission f	for storage			
Username wd_user						
	User Accou	nt				
Password:	Username	wd_user				
	Paceword					

- 5. In the table, select the check box(es) for the desired services. The services allow you to to serve the contents stored on the USB device using Share (SMB), DLNA, iTunes, and FTP.
- 6. Create or change your user account by entering a user name and password for accessing content on the USB device (e.g., music for iTunes). The default value is **Public**.

7. Click **Next** to save your settings.

습		•))	8	+	හි
	ard Connect to Internet	Set up Wireless	Set up Storage	Add a Device	
🖲 Set up	Storage				
	Step 4. Setup Comp You have finished basic setup To change other options of the	of attached storage for use		ge section of the Advanc	ed Settings
				Back	Finish

8. On the Step 4 screen, click **Finish**. The My Dashboard home screen appears.





To connect a WPS-enabled wireless device, press the **WPS** button on the front of the router or enter a PIN on the device's Wi-Fi connection page. If the device is not capable of WPS, you can still connect to the router using a network name and password.

			() ()	8	- T <mark>.</mark>	දිටු
		Connect to Internet	Set up Wireless	Set up Storage	Add a Device	
<u>†</u> .	Add a Dev	vice				
	the My Net ro	ss device is capable buter by simply pushir is not capable of WP	ig the WPS buttons	or by entering a PIN	1.	
	and passwo		e, you can can com	loor by entering a ne		
		connect using WPS connect by entering n	etwork name and pas	ssword		

To connect a WPS-enabled device:

1. Click the **Click here to connect using WPS** link to display the screen shown below:

My Dashboard	Connect to Internet	Set Up Wireless	Set Up storage	Add a Device	Advanced Settings
[†] ⊡ Add a De	vice				
Select on	e of two WPS (W	-Fi Protected S	etup) methods.		
Method 1:	Push Button method				
Press th	e WPS 💿 button sho	wn here			
		I)		
Method 2:	PIN method				
If reque	sted for the router's WP	S PIN, enter following	PIN on your device:		
		6183556	6		
					Next
2011 Western Digital, All rights reserved					

- 2. Select one of the two WPS methods:
 - a. **Method 1:** Press the **WPS** button on the front of the router or click the virtual button on this screen. On your wireless device, press the physical **WPS** button or click the virtual **WPS** button.
 - b. **Method 2:** If prompted by your wireless device, enter the router's WPS PIN shown on the screen into your wireless device.
 - *Note:* The label on the bottom of the router displays the default PIN. You can change the PIN on the Wi-Fi Protected Setup screen. (See "Advanced Wireless Category" on page 36.) Once you change the PIN, the default value is invalid unless you reset the router to default values.

3. Click Next.

To connect a device that is not WPS enabled:

1. On the Add a Device screen, click the **Click here to connect by entering network name and password** key.

		X		203	
My Dashboard Connect to Interne	t Set up Wireless S	Set up Storage	Add a Device	Advanced Settings	
Add a Device					
Step 1:			D 146 Filestein		
From your wireless device, select one 2.4Ghz SSID		rnDigital	D, WI-FI network, or h	ome network) below.	
5Ghz SSID	Wester	WesternDigital			
Step 2: Once you select the wireless network, network key). Enter the corresponding 2.4 Ghz Frequency (Wester	password below for the wireless			security key, pass key or	
Password:	(no	password need	led)		
5 Ghz Frequency (Western	Digital)				
Password:	(no	password need	led)		
				Back	
				Back	

- 2. Using the values shown on the screen, enter the following into your wireless device's Wi-Fi connection screen as prompted:
 - The Wi-Fi network SSID for the wireless network you want to use
 - The password for the wireless network you selected

Note: By default there is no password. If a password was configured during setup, that password displays in the password field.

3. Click Close.

5

Advanced Settings


The **Advanced Settings** icon takes you to screens and icons for entering more detailed settings and configuring more advanced functions than those discussed in the previous chapter.

Note: Another way to access the Advanced Settings screen is to click the arrow to the right of the setting on the basic screen. When a "basic" icon has a small Advanced Settings icon to its upper left, you are configuring that function's advanced settings. For example, the icon for Internet Settings looks like this:

This chapter contains the following topics:

Typical Advanced Settings Screen Advanced WAN (Internet) Category Advanced Wireless Category Advanced LAN Category Security Settings Category Additional Features Category Admin Category

Typical Advanced Settings Screen

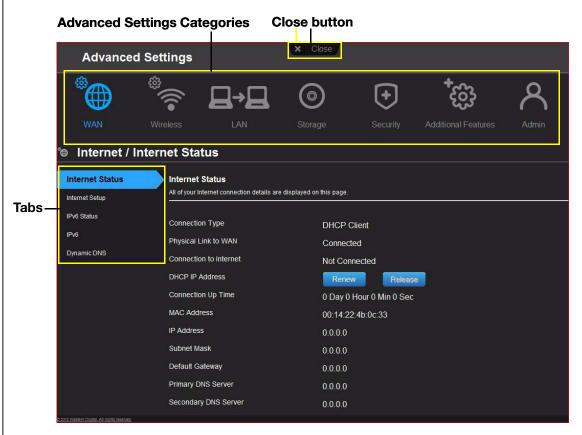

Note: To close an Advanced Settings screen, click the **Close** button at the top of the screen. The My Dashboard home screen displays.

Advanced N	WAN (Interne	et) Category 🕲
Advanced	Settings	X Ulose
	*	A ∰ € ©
WAN	Wireless LAN	Storage Security Additional Features Admin
Internet / Internet / Internet Status	Internet Status	are displayed on this page.
IPV6 Status IPV6	Connection Type	DHCP Client
Dynamic DNS	Connection to Broadband Network connection to ISP	Connected Not Connected
	DHCP IP Address	Renew Release
	Connection Up Time	0 Day 0 Hour 0 Min 0 Sec
	MAC Address	00:90:a9:a5:5d:40
	IP Address	0.0.0
	Subnet Mask Default Gateway	0.0.0.0
	Primary DNS Server	0.0.0
	Secondary DNS Server	0.0.0.0
	Secondary DNS Server	0.0.0.0

Screen Descriptions

Internet Status – View current Internet connection details. Allows you to renew or release a DHCP IP Address or to connect or disconnect a PPTP/PPPoE connection.

Internet Setup – Configure your Internet connection type.

IPv6 Status – View all Internet and network connection details related to the IPv6 Internet protocol.

IPv6 – Configure the IPv6 connection type and internal network settings of your router.

Dynamic DNS (DDNS) – Host a server (for example, an FTP or a Game server) using a domain name purchased with your dynamically assigned IP address from a DDNS service provider. Once you have DDNS set up, others can just enter your domain name into their browser or FTP client, for example, and connect just as they would to any other site.

Internet Status Screen

Internet Status	
Connection Type	Can be Static IP, Dynamic IP (DHCP), PPPoE (Username/Password), or PPTP (Username/ Password).
Physical Link to WAN	Indicates whether the router has established a physical link to the WAN.
Connection to Internet	Indicates whether the router is connected to an Internet Service Provider.

DHCP IP Address	IP address assigned dynamically by a DHCP server. Click the Renew button to renew the address or the Release button to return it to the pool for other clients.
Connection Up Time	Days, hours, minutes, and seconds the connection has been active.
MAC Address	Unique identifier that the manufacturer assigns to a device.
IP Address	The WAN/Internet IP address assigned to your router by the ISP.
Subnet Mask	The Subnet Mask is configured and maintained by your ISP. Check with your ISP for this information.
Default Gateway	The IP address of the device to which your router is connected.
Primary DNS Server	The primary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.
Secondary DNS Server	The secondary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.
Internet Connection Type: Static IP	
IP Address	The WAN/Internet IP address assigned to your router by the ISP.
Subnet Mask	The Subnet Mask is configured and maintained by your ISP. Check with your ISP for this information.
Default Gateway	The IP address of the device that your router is connected to.
Primary DNS Server	The primary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.
Secondary DNS Server	The secondary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.
MTU (Maximum Transmission Unit)	Size (in bytes) of the largest protocol data unit that can be transmitted over the network.

Primary DNS Server	The primary DNS Server address is configured and
	maintained by your ISP. Contact your ISP for this information.
Secondary DNS Server	The secondary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.
MTU (Maximum Transmission Unit)	Size (in bytes) of the largest protocol data unit that car be transmitted over the network.
MAC Address	Identification number assigned to the router by the manufacturer. Clone Your computer's MAC Address button: Copies the MAC address of the computer that are you currently using into the MAC address field. This allows the router to present your computer's MAC address to your ISP.
Internet Connection Type: PPPoE	(Username/Password)
Address Mode	Select to assign the router either a static or a dynamic IP address.
Username	Username for accessing the ISP.
Password and Verify Password	Password for accessing the ISP.
Service Name	Your ISP configures and maintains the Service Name. Contact your ISP for this information.
Reconnect Mode	Select one of the reconnect modes for your PPPoE connection:
	 Always On – Your Internet connection will remain connected and reconnect if there is a disconnection from the server.
	• On Demand – Your Internet connection will disconnect after the Idle time has passed. The connection will automatically reconnect when a client attempts to access the Internet.
	• Manual – You can connect or disconnect the Internet connection on the Internet Status page.
Maximum Idle Time	Number of minutes the connection can be idle; 0 (zero means the disconnection can last indefinitely.
DNS Mode	Method by which names are associated with IP addresses.
Primary DNS Server	The primary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.
Secondary DNS Server	The secondary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.

MTU (Maximum Transmission Unit)	Size (in bytes) of the largest protocol data unit that can
	be transmitted over the network.
MAC Address	Unique identification number assigned to the router by the manufacturer. Clone Your computer's MAC Address button: Copies the MAC address of the computer that are you currently using into the MAC address field. This allows the router to present your computer's MAC address to your ISP.
Internet Connection Type: PPTP (Use	ername/Password)
Address Mode	Server address can by dynamic or static.
PPTP Server IP Address	IP address of the PPTP server.
Username	Username for accessing the ISP.
Password and Verify Password	Password for accessing the ISP.
Reconnect Mode	 Select one of the reconnect modes for your PPPT connection: Always On –Your Internet connection remains connected and reconnects if the router disconnects from the server. On Demand –Your Internet connection disconnects after the Idle time has passed. The connection automatically reconnects when a client attempts to access the Internet. Manual – You can connect or disconnect the Internet connection on the Internet Status page.
Maximum Idle Time	Number of minutes the connection can be idle; 0 means the disconnection can last indefinitely.
Primary DNS Server	The primary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.
Secondary DNS Server	The secondary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.
MTU (Maximum Transmission Unit)	Size (in bytes) of the largest protocol data unit that car be transmitted over the network.
MAC Address	Unique identification number assigned to the router by the manufacturer. Clone Your computer's MAC Address button: Copies the MAC address of the computer that are you currently using into the MAC address field. This allows the router to present your computer's MAC address to your ISP.

IPv6 Status Screen

IPv6 Connection Information	
IPv6 Connection Type	Click to select Static IPv6, Auto (SLAAC/DHCPv6), PPPoE or Link-local Only connection type to connect to your ISP. Check with your ISP for this information.
IPv6 Default Gateway	The IPv6 address of the gateway device to which your router is connected.
LAN IPv6 Link-Local Address	The LAN link-local IPv6 address of your router.
LAN IPv6 Computers	
IPv6 Address	IPv6 address of the computer on the IPv6.
Name (if any)	Name of the computer associated with the IPV6 address.

IPv6 Screen

My IPv6 Connection Type	Click to select Static IPv6, Auto (SLAAC/DHCPv6), PPPoE or Link-local Only connection used to connect to your ISP. Check with your ISP for this information.
LAN IPv6 Address Setting	
LAN IPv6 Link-Local Address	Local IPv6 IP address that has been assigned automatically.

Dynamic DNS Screen

Dynamic DNS Settings	
Dynamic DNS	Click On or Off to enable or disable dynamic DNS.
DNS (Domain Name System) Server	System that translates text host names into numeric IP addresses used to uniquely identify any device connected to the Internet.
Host Name	The host name (domain name) you configured/ purchased from your DDNS service provider.
Username (Email)	Username (email) required to access your DDNS account.
Password (Key) and Verify Password (Key)	Password required for accessing your DDNS account.
Status	Status of whether your router can successfully connect to and update your IP address to the DDNS service.

Auvanced	Settings	× Close			
[®]	* • •		•	දිටු?	R
WAN	Wireless LAN		Security Ad		Admin
Vi-Fi Protected Setup	Wireless 2.4Ghz	On WesternDigital	Wireless 5Ghz		
	Network Name (SSID)	WesternDigital	Network Name (SS		~
		WesternDigital		ID) WesternDigital	~
Wi-Fi Protected Setup Guest Access	Network Name (SSID) Security Mode	WesternDigital	Network Name (SS Security Mode	ID) WesternDigital	
	Network Name (SSID) Security Mode Network Mode	WesternDigital None · Mixed 802.11 b+g+n ·	Network Name (SS Security Mode Network Mode Channel Width	ID) WesternDigital None Mixed 802.11 a+n	
	Network Name (SSID) Security Mode Network Mode Channel Width	WesternDigital None Mixed 802.11 b+g+n 20 MHz	Network Name (SS Security Mode Network Mode Channel Width	ID) WesternDigital None Mixed 802 11 a+n 20/40 MHz(Auto)	

Screen Descriptions

Wireless Setup – Change wireless settings and turn SSID Broadcast and WMM QoS On or Off.

Wi-Fi Protected Setup – Add a new wireless device into this network using the WPS push button or PIN; generate a new PIN or set it to the default value.

Guest Access – Allow visitors access to the 2.4 GHz and 5 GHz wireless bands.

Wireless Setup Screen

Wireless 2.4 GHz and Wi	ireless 5 GHz
Network Name (SSID)	Name given to the wireless network.
Security Mode	Type of security being applied to the wireless network. Options include WEP (Wired Equivalent Privacy)-Personal, WPA2-Personal, WPA-Personal, WPA/WPA2-Personal (default), WPA-Enterprise, WPA2-Enterprise, and WPA/WPA2-Enterprise. If 802.11n is selected as the network mode, WEP is not available, but it is available to 802.11b-only, 802.11 g-only,
	802.11 a-only, and a mix of these.
Network Key	Password for accessing the wireless network.
	 For some Enterprise modes, additional fields display: Radius Server IP Address Port
	Shared Secret
Network Mode	For the 2.4 GHz band, the default network mode is Mixed 802.11 b+g+n. Keep this setting for maximum client compatibility. The other network modes are 802.11b only, 802.11g only, 802.11n only, Mixed 802.11 b+g, and Mixed 802.11 g+n.
	For the 5 GHz band, the default network mode is Mixed 802.11 a+n. Keep this setting for maximum client compatibility. The other network modes are 802.11a only and 802.11n only.
Channel Width	The default setting of 20/40 MHz (Auto) for the 5 GHz network is recommended unless you are having connectivity issues. The default for the 2.4 GHz network is 20 MHz.
Channel	Accept the default (Auto) or select a channel from the drop- down list.
SSID Broadcast	Your wireless clients identify and connect to your router using the network name or SSID (Service Set Identifier). The SSID broadcast is On by default. For additional security, you can turn SSID broadcast to Off .
WMM QoS	WMM (Wi-Fi Multimedia) is a standard that defines quality of service (QoS) in Wi-Fi networks, prioritizes capability, and optimizes video and audio performance.
	WMM QoS is forced to On (grayed out) when the Network mode set includes 802.11n. If you select any mode not including 802.11n, you have the option to turn WMM QoS Off .

Wi-Fi Protected Setup (WPS) Screen

Add new wireless device	into this network
Router/Access Point: PIN Code	Personal identification number for WPS authentication.
Wi-Fi Protected Setup (W	(PS)
	11-3)

Guest Access Screen

Wireless 2.4 GHz and Wi	reless 5 GHz
Guest Network SSID	Accept the default value or enter another name for the wireless networks.
Security Mode	 The default value is None. If you toggle the Security Mode button to Off, from the drop-down list, select the type of security needed to restrict guess access: WPA/WPA2 - Personal WPA - Personal WPA2 - Personal
Network Key	Password for accessing the wireless network.

Advanced LAN Category ⊒→⊒

Advanced	Advanced Settings					
ش ا	•)) [®]	⊒→⊒	0	÷	ැහි †	ጽ
WAN		LAN	Storage	Security	Additional Features	Admin
Host and LAN Sett DHCP Server Settings Device and Client Tables		e e is used to identify your	device in the network. MyNetN7	50		
	IP Address This Internet s LAN IP Addr Subnet Mas Enable DNS	- etting will be used in the ess K	2 LAN side when the device 192.168 255.255.2	1.1	r mode.	
			On	<u> </u>	Cancel	Save

Screen Descriptions

Host and LAN Settings – View and change host name, subnet mask, and LAN IP address, and enable DNS (Domain Name System) relay.

DHCP Server Settings – Enable or disable DHCP server, which provides the IP address to the LAN-side computers dynamically, when your router is working in router mode

Device and Client Tables – View the DHCP client table. This table shows all of the wired and wireless devices that are connected to the router. You can manually add a device to the table.

Host and LAN Settings Screen

Host Name	
Host name	Name identifying the router on the network.
IP Address	
LAN IP address	IP address of the router on the network (when router is in router mode).
Subnet Mask	The subnet mask is used to control how many subnetworks exist in your local network. The more subnetworks there are, the fewer the hosts you can have per subnet.
Enable DNS Relay	LAN-side clients use the router to relay DNS queries to the Internet.

DHCP Server Settings Screen

DHCP Server	
Enable DHCP Server	Enable the server that provides an IP address to the LAN-side computers dynamically when your router is working in router mode.
DHCP IP Address Range	Range of IP addresses that can be assigned by the DHCP server.
Local Domain Name	You can append a local domain name to your clients' Internet requests to avoid entering the complete address of commonly used Internet domains. (For example, when setting the local domain name wdc.com, entering store in a client's web browser results in a request for store.wdc.com.)
DHCP Lease Time	Amount of time for which the device or computer leases the DHCP address. If the client does not renew the lease before it expires, the IP address returns to the pool for other clients.

Device and Client Tables Screen

DHCP Client Table	
IP Address	IP address of a device on your network.
MAC Address	Unique identifier of the device being added.

Device Name	Name of the device attached to your network.	
Lease Time	Amount of time remaining for the client's IP address lease.	
Manual Add Device		
IP address	IP address of the device being added on your network.	
MAC Address	Unique identifier of the device being added.	

Advanced Storage Category

	Wireless		Storage	Securit	l dditio	bonal Features	Admin
◎ Storage / S ^a	torage						
Storage Safely Remove		c tion for storage. re function for storage and s	etup the account an	d password.			
		Storage	Share	DLNA	iTunes	FTP	
		USB1					
	Hide			Desi			
		Storage Port USB1			ce name TransMemory		
	Public S User Ac						

Screen Descriptions

Storage – You can update your user account and storage settings on this screen. (See "Setting Up External Storage" on page 25.)

Safely Remove – Use this screen to safely remove USB storage devices connected to the router's USB port(s).

Storage Screen

Share function for storage	ge
Storage	USB port that the storage device is connected to on the My Net router.
Share	Files sharing service among local network client devices using the SAMBA protocol.
DLNA (Digital Living Network Alliance)	Makes stored digital media contents available to networked media players.
iTunes	Allows streaming of music to other devices in the network that have iTunes.
FTP	Uses the File Transfer protocol (FTP) to exchange files over the network.
Show/Hide	
Storage Port	Click the Show button to display the number of the port to which the storage device is attached. My Net N600 has one USB port; My Net N750 and My Net N900 have two USB ports.
Device name	When you click the Show button, the name of the storage device appears.
Set up access permissio	n for storage
User Account	Select to enable user account authentication access to the shares/services.
Public Share	Select to enable public access (no authentication) to the shares/services. Selected by default.
Username	To restrict public access, enter the username of the person being granted access to the share.
Password	Enter the password of the person being granted access to the private share.

Safely Remove Screen

Remove the storage safe	ły
Storage Port	Number of the port to which the storage device is attached. My Net N600 has one USB port; My Net N750 and My Net N900 have two USB ports.
Device name	Name of the storage device.
Eject button	Click the button to the right of the USB device name on the table to safely detach the USB storage drive.

Security S	Setting	s Cate	egory	•			
Advanced	Settings		×	Close			
	•))	⊒→		9	€	දිටු දිටු	ද
wan ⊡ Security / F	Wireless	LAN		orage	Security	Additional Featu	ires Admin
Firewall	Firewall You can se		nis device in this pa	ge. The firewall rules	allow you to block	specific incoming or out	going traffic by IP address or
MAC Filter Parental Controls		Firewall Rules		32		с	ancel Save
			Name Action Allow	Source Source Destination Destination	Destination		otocol All
			Name	Source	Source IP	Pr	otocol

Screen Descriptions

Firewall – Set up a firewall for this router to block specific incoming or outgoing traffic by IP address and/or ports.

DMZ – Set up a DMZ (Demilitarized Zone) to allow computers behind the router firewall to be accessible to Internet traffic. Typically, your DMZ would contain Web servers and FTP servers.

You can set up a single computer on your network outside of the router. If you have a computer that cannot run Internet applications successfully from behind the router, you can place the computer into the DMZ for unrestricted Internet access.

Note: Firewall settings and Port Forwarding Rules supersede the configured DMZ host.

Important: Because of serious security concerns, use this option only as a last resort.

MAC Filter – Control network access based on the MAC address of the client device. The MAC address is a unique ID assigned by the manufacturer.

Parental Controls – Control Internet access to specific websites and access periods. See "Setting Up Parental Controls" on page 56.

Firewall Screen

Create Firewall Rules	
Name	Name to identify the firewall rule.
Source	Local network (LAN) or Internet (WAN).
Source IP Range	Range of IP addresses where the traffic initiates.
Protocol	Protocol that will be applied in the firewall rule. Available options are All, TCP, UDP, and ICMP.
Action	From the drop-down list, select whether to allow or deny incoming and outgoing traffic.
Destination	Local network (LAN) or Internet (WAN).
Destination IP Range	Range of IP addresses where the traffic is destined.
Port Range	Network traffic port range that will be applied in the firewall rule.

DMZ Screen

DMZ Host	
Enable DMZ	Toggle the button to On to enable DMZ.
DMZ IP Address	If DMZ is enabled, select a computer from the list and click the double arrows to populate the IP address, or manually enter the computer's IP address.

MAC Filter Screen


MAC Filtering Rules	
MAC Filtering drop-down list	 The default setting is Turn MAC Filtering OFF. Other options are: Turn MAC Filtering ON and DENY computers listed to access the network. Turn MAC Filtering ON and ALLOW computers listed to access the network.
Active	Status of the MAC filtering entry.
MAC Address	Unique identifier of your local network device being filtered.
Double arrows	After selecting a computer from the DHCP Client List, click the double arrows to populate the MAC Address box.
DHCP Client List	Computers and devices that are currently connected to your router.

DMZ Screen

Computer Name	Name assigned to the computer for easier identification. Click
	the computer name to populate its MAC address.

Internet Security & Parental Controls Screen

Parental Controls	
Enable parental control	Toggle the button to On .
Router location	 From the drop-down list, select the region where the router is located: USA EMEA (Europe, Middle East, Africa) APAC (Asia Pacific) Click Apply.
Router Registration (Pare	ental Controls)
Email address	Email address to be used for accessing your Parental Control settings.
Password	Password to be used for accessing your Parental Control settings.
Device Information	
Active	Select to activate parental controls on the associated computer or device.
Device name	Name assigned to the computer or device on the network.
MAC Address	Unique identifier that the manufacturer assigns to a device.

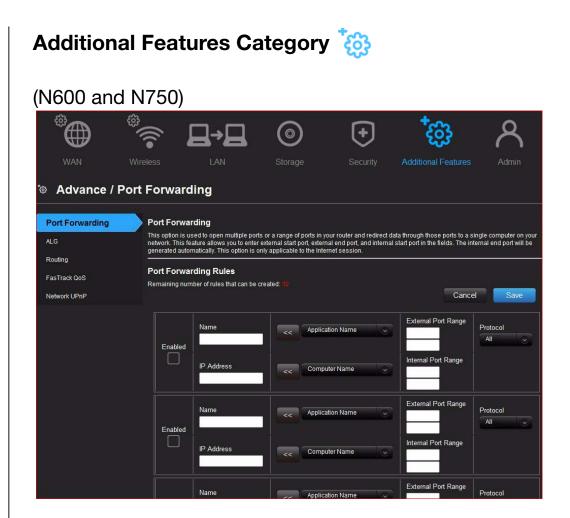

(N900)

ort Forwarding	Port Forwarding
_G	This option is used to open multiple ports or a range of ports in your router and redirect data through those ports to a single computer network. This feature allows you to enter external start port, external end port, and internal start port in the fields. The internal end port w generated automatically. This option is only applicable to the Internet session.
outing	Port Forwarding Rules
ISTrack Plus QoS	Remaining number of rules that can be created: 92
hanced WMM	Cancel
etwork UPnP	External Port Range
	Name Application Name Protocol All
	Enabled Internal Port Range
	IP Address Computer Name
	Allow All
	Name External Port Range Protocol
	All V
	Enabled Internal Port Range
	IP Address Computer Name

Screen Descriptions

Port Forwarding – Open a single port or a range of ports in your router and redirect data through those ports to a single computer on your network. Applies only to an Internet session.

ALG – Enable or disable Application Level Gateway (ALG) configuration. This allows certain clients, such as PPTP, IPSec or SIP, to have temporary firewall rules created automatically when detected by the firewall.

Routing – Define static routes to specific destinations.

FasTrack QoS – (My Net N600 and N750 routers) Configure QoS powered by WD FasTrack QoS technology. This engine improves your media applications and online game experience by prioritizing your game traffic over other network traffic, such as Web traffic. Use QoS rules to set the priority of your applications.

FasTrack Plus QoS (My Net N900 router) – Configure FasTrack Plus QoS powered by WD FasTrack Plus QoS technology. This technology improves your online gaming experience by ensuring that your game traffic is prioritized over other network traffic, such as FTP or Web.

Enhanced WMM (My Net N900 router) –Wi-Fi Multimedia (WMM) refers to QoS (Quality of Service) over Wi-Fi. QoS enables Wi-Fi access points to prioritize traffic and optimizes how different applications share network resources.

Network UPnP – Enable or disable peer-to-peer Plug and Play functionality for network devices

Port Forwarding Pulsa	
Port Forwarding Rules	
Enabled	Select to enable the port forwarding rule. Clear the check box to disable.
Application Name	From the drop-down list, select the application whose data you want to forward to the client on your local network. Click the double arrows to populate the Name, Internal Port, External Port, and Protocol fields.
External Port Range	Enter the port(s) you want to forward from the WAN interface (Internet). The port is automatically populated when you pick an application from the drop-down list.
Protocol	Select the protocol that you wish to port forward. The options are All, TCP, and UDP. The protocol will be automatically selected if you pick an application from the drop-down list.
IP Address	Can be manually entered or populated by your selection from the Computer Name drop-down list.
Computer Name	Device on your local network to which the rule will be applied. Click the double arrows to populate the IP Address field.
Internal Port Range	Enter the port(s) on the LAN client to which you want to forward data. The port is automatically populated when you pick an application from the drop-down list.

Port Forwarding Screen

ALG Screen

Application Level Gateway (ALG) Configuration	
PPTP (Point-to-Point Tunneling Protocol)	Turn On (default) PPTP ALG if you use a PPTP client to dial into your corporate network via the Internet.
IPSec (VPN)	Turn On (default) IPSec ALG if you use a IPSec client to dial into your corporate network via the Internet.
SIP (Session Initiation Protocol)	A signaling protocol for Internet Telephony. Turn On (default) SIP ALG if you use VoIP telephone service over your Internet connection.

Routing Screen

Route List	
Active	Select the check box to enable the routing entry.
Name	Enter a name for the routing entry.
Interface	Select the interface (WAN or LAN) for the routing entry.
Destination IP	IP address/network to which the data is sent.
Netmask	Enter a Netmask for the Destination IP to define the destination network.
Gateway	Enter the Gateway IP address through which this router can be reached. The Gateway IP should be reachable from your router.

FasTrak QoS Screen (My Net N600/My Net N750 Routers)

Enable QoS	
Enable QoS	Enable or disable the QoS application to prioritize different client applications/traffic types over the Internet.
QoS Setup	
Uplink Speed	The uplink speed (in Kbps) at which data can be transferred from the router to your ISP. The Auto (default) setting can automatically detect the uplink speed, or you can select other values from the drop-down list or enter your own. QoS prioritizes all Internet traffic based on this setting.
FasTrack Rules	Click the Restore Default button to restore the default names and priorities.
Classification Rules	
Name	Name given to the service/client for the classification entry.

Priority	When creating a rule, select the precedence in which the application or device sends data over the network compared to other applications or devices. The default value is 1-Highest.
Туре	From the drop-down list, select the option that specifies whether the rule applies to a connected device or to an application.
Detail	 For Device rules, specify the LAN IP and/or Remote IP address(es), and protocol(s) for the rule. For Application rules, specify the Start and End port as well as the protocol for the rule. The protocols available are TCP, UDP, and Both.
Delete icon	Click to delete the row.

FasTrack Plus QoS (My Net N900 Router)

Enable FasTrack Plus Qo	Enable FasTrack Plus QoS	
Enable FasTrack Plus QoS	Enable or disable the QoS application to prioritize different client applications/traffic types over the Internet.	
WAN Uplink Speed		
Set Uplink Speed at	The uplink speed (in Kbps) at which data can be transferred from the router to your ISP. The Auto (default) setting automatically detects the uplink speed. You can select other values from the drop-down list or enter your own. QoS prioritizes all Internet traffic based on this setting.	
Classification Rules		
Name	Name given to the service/client for the classification entry.	
Priority	When creating a rule, select the precedence in which the application or device sends data over the network compared to other applications or devices. The default value is 1-Highest.	
Protocol	Internet protocol for transferring data. Select TCP or UDP.	
Local IP Range	IP address range of the device(s) on your local network the rule applies to.	
Local Port Range	Port range of the application(s) on your local network the rule applies to.	
Remote IP Range	Remote IP address range of the service on the Internet the rule applies to.	
Remote Port Range	Remote port range of the service on the Internet the rule applies to.	

Enhanced WMM Screen (My Net N900 Router)

Enhanced WMM Setup	
Enable Enhanced WMM	Enhanced WMM is enabled by default. This feature prioritizes the traffic of various wireless (WI-Fi) applications.
Classification Rules	
Name	Name given to the service/client for the classification entry.
Priority	When creating a rule, select the precedence in which the application or device sends data over the network compared to other applications or devices. The default value is 1-Highest.
Protocol	Internet protocol for transferring data. Select TCP or UDP.
Local IP Range	IP address range of the device(s) on your local network the rule applies to.
Local Port Range	Port range of the application(s) on your local network the rule applies to.
Remote IP Range	Remote IP address range of the service on the Internet the rule applies to.
Remote Port Range	Remote port range of the service on the Internet the rule applies to.

Network UPnP Screen

UPnP	
Enable/Disable UPnP IGD (Internet Gateway Device)	Toggle to enable or disable Universal Plug and Play functionality for network devices.

Admin C	dmin Category <mark></mark>			
Advanced	d Settings			
	[©] ♀ 			
WAN	Wireless LAN Storage Security Additional Features Admin			
우 Admin / Ac	dministrator			
Administrator	Admin Password			
Time Settings	The 'admin' account can access the management interface. The admin has read/write access and can change the password. By default there is no password configured. It is highly recommended that you create a password to keep your router secure.			
Firmware Update				
System	Admin Password Please enter the same password into both boxes for confirmation.			
Connection Check	Original Password			
Registration	New Password			
Log	Verify New Password			
Language				
Device Mode	Administration			
	Enable HTTPS Server			
	Remote Management			
	Enable Remote Management			
	Remote Admin Port 8080			
	Notice: Remote Admin Port can not be in the external port range of Port Forwarding.			
	Use HTTPS			

Screen Descriptions

Administrator – The admin account manages the router interface. The admin has read/write access and can create passwords. The default password is **password**; to keep your router secure, it is a best practice to create a new password. See "Changing the Administrator's Password" on page 62.

Time Settings – Configure, update, and maintain the correct time on the router manually or automatically by NTP (Network Time Protocol).

Firmware Update - Check for router firmware updates and upload new firmware.

System – Save configuration settings on your local hard drive, load configuration settings, or restore factory default settings.

Connection Check – Use ping tests to check connectivity between the router and network/Internet hosts.

Registration – Register your router if you have not already done so. Registering enables WD to notify you of updates to the firmware and send you important information.

Log – Display and save logs generated by the router.

Language – Change language settings.

Device Mode – Configure your router to operate in router mode or extender mode. When the router is used as an access point, extender mode adds wireless capability to your existing network, expanding Internet access to all the computers in your home.

Administrator Screen

Admin Password	
Original Password	Enter the existing password for the admin (administrator) account. The default is password (all lower case).
New Password/Verify New Password	Type the same new password for each.
Administration	
Enable HTTPS Server	Click to enable or disable Hypertext Transfer Protocol Secure (HTTPS), a combination of Hypertext Transfer Protocol (HTTP) with SSL/TLS protocol. It provides encrypted communication and secure identification of your web connections to your router.
Remote Management	
Enable Remote Management	Click to enable the user to manage the router from a remote location.
Remote Admin Port	The port that will be used for remote management connections. Default is 8080. The Remote Admin Port cannot be used in an external port range of any port forwarding rules.
Use HTTPS	Click to enable or disable use of HTTPS for remote management of the router.

Time Settings Screen

Time and Date Configuration			
Time	Current date and time at the router's location.		
Time Zone	Select the time zone in which the router is located.		
Enable Daylight Saving	Click to enable or disable Daylight Saving time.		
Daylight Saving Offset	If you select Daylight Saving time, from the drop-down list, select the daylight saving offset. The offset is a formula that combines a time of day with the time zone and is based on a 24-hour clock.		
Daylight Saving Dates	If you select Daylight Saving time, from the drop down lists select the month, week, day of the week, and time of the start and end of Daylight Saving time in your time zone.		
Automatic Time and Date	Automatic Time and Date Configuration		
Network Time Protocol Function	Click to enable use of Network Time Protocol (NTP).		
Adding User Defined NTP Server	Add alternate NTP servers to be used.		
NTP Server Used	From the drop-down list, select the name of the NTP server to be used.		

Firmware Update Screen

Firmware Information	
Current Firmware Version	Version of the router's current firmware.
Current Firmware Date	Date of current firmware.
Check Online Now for Latest Firmware Version	Click Update Now to update your router's firmware to the version displayed.
Firmware Upgrade from a	File
Select a File to Upgrade	<i>Note:</i> It is a best practice to update the firmware file when the router has a wired connection to your computer.
	You have two options:
	1. Click Choose a File and browse to the firmware file.
	2. If it is available, do one of the following:
	- Update your current firmware by clicking Upload
	 Select the file, save it, and click Upload to upgrade the router firmware.
	<i>Note:</i> For assistance, contact Customer Support at <i>http://support.wdc.com.</i>

System Screen

Save and Restore Settings	
Save settings to a file	Click Save Configuration . The router's current configuration is downloaded to your computer.
Restore Settings from a File	To restore settings from a file, click Choose File and select it. Click Restore Configuration .
Reset to Factory Default Settings	To reset the router to its original settings, click Reset .
Reboot the router	Click Reboot .
Logout	
Logout	Click Logout.

Connection Check Screen

Ping Test	
Host Name or IP Address	Enter the host name or IP address of a computer you want to locate on the network. Click Ping .
Ping Result	The result of whether your router can reach the specified host name or IP address.

Registration Screen

Registration	
First Name, Last Name, Email Address	Enter your first and last name and email address. Click Register.

Log Screen

Save Log File	
Save Log File to Local Hard Drive	After generating a system log file, click Save .
Log Level	
Log Level	From the drop-down list, select the alert level of the log you want to generate. Options are Debug, Notice, and Warning.
System Log Status	
Log Type	From the drop-down list, select the type of log you want to generate. Options are System, Attack, and Drop. The default is system log.
Log Table	
Log Table	Click the tabs to reveal the log pages you want to view, or to clear or refresh the table.

Language Screen

Language	
Select language	From the drop-down list, select the language in which you want the user interface to display.

Device Mode Screen

Device Mode	
Mode	From the drop-down list, select whether the router should be in Router Mode or Extender Mode. When this device is set to Extender Mode, it adds/extends wireless capability to your existing network.
LAN Connection Type	If you select Extender Mode, this drop-down list displays. Select Static IP or Dynamic IP (DHCP). If you select Static IP, additional fields display.
LAN IP address	IP address of the device that is being configured as an Extender. The IP address should be on the same network as your existing router.

Subnet Mask	The subnet mask is used to control how many subnetworks can exist in your local network. The more subnetworks there are, the fewer the hosts you can have per subnet.
Default Gateway	IP address of the router to which this device is connected while configured as an extender.
Primary DNS Server	The primary DNS Server address is configured and maintained by your ISP. This can be found on your main router or contact your ISP for this information.
Secondary DNS Server	The secondary DNS Server address is configured and maintained by your ISP. Contact your ISP for this information.

Performing Advanced Tasks

This chapter describes the most important tasks the administrator performs in setting up and maintaining the My Net router. It includes the following topics:

Enabling Guest Access Setting Up Parental Controls Changing the Administrator's Password Accessing Files Stored on an Attached USB Drive Updating the Router's Firmware Restoring the Router to Factory Defaults Rebooting the Router Using the Router as an Access Point Configuring UPnP **Enabling Port Forwarding** Accessing My Net View

Enabling Guest Access 🥍



A guest network allows visitors to get Internet access without giving them access to your home network.

To enable guest access:

- 1. Click the **Advanced Settings icon** and then the **Wireless** icon to display the Wireless/Guest Access screen.
- 2. Click the Guest Access tab.



3. For the wireless 2.4 GHz and/or 5 GHz band, toggle the **On/Off** button to turn access on.

Advanced S	ettings				
[®]	°~ ⊒→		+	€ටු•්	ጽ
	Guest Access Guest Network allows visitors	s to get internet access without giving	them the keys to your t	home network.	
/i-Fi Protected Setup	Guest Network allows visitors	s to get internet access without giving Name and Pass Key for both 2.46H			
Vi-Fi Protected Setup	Guest Network allows visitors It is the same Guest Network	Name and Pass Key for both 2.4GH	and 5.0GHz clients.	Ghz On alla	l_guest
Vireless Setup Vi-Fi Protected Setup <mark>Guest Access</mark>	Guest Network allows visitors It is the same Guest Network Wireless 2.4Ghz Guest Network SSID Security Mode	Name and Pass Key for both 2.4GH	t and 5.0GHz clients. Wireless 5 Guest Netwo Security Moc	GGhz On Lill ork SSID WestemDigita de WPA Persona	4
/i-Fi Protected Setup	Guest Network allows visitors It is the same Guest Network Wireless 2.4Ghz Guest Network SSID	Name and Pass Keyfor both 2.4GH	and 5.0GHz clients. Wireless 5 Guest Netwo	iGhz On III Irk SSID WesternDigita Je WPA Persons AUTO(TKIP/AI	1 ×

4. Specify the following:

Setting	Description
Guest Network SSID	Accept the default value or enter another name for the wireless network.
Security Mode	 The default value is None. To restrict guest access, select the type of security needed from the drop-down list: WPA - Personal WPA2 - Personal WPA/WPA2 - Personal
Network Key	Create a password for the guest user to prevent an unauthorized user from accessing your guest network.

5. Click Save.

Setting Up Parental Controls

Registering Parental Controls

Set up your router with parental controls that restrict the websites, times, and content a user can access on the Internet. You can set controls on a master level that apply to all devices connected to the router or to individual devices. You need to register the router to activate Parental Control service for your router.

To set up parental controls:

- 1. Click the **Advanced Settings icon** and then the **Security** icon to display the Security/Parental Controls screen.
- 2. Click the Parental Controls tab.
- 3. Toggle the **Enable parental control** button to **On**. The Security/Parental Controls screen appears.

- 4. For **Device location**, select the region where the router is located.
- 5. Click **Apply**. The screen expands to enable you to register the router and the devices using the router.

Advanced S	ettings		× Close			
	and the second s		() Storage	Security	+cost Additional Features	Admin
Security / Pai	rental Con	trols				
Firewall	Internet Se	curity & Parental Co	ontrols			
DMZ MAC Filter	Enable paren	tal control	On			
Parental Controls	Device locatio	n	USA			
	1					
	W) merrer Router Reg	t servine controls po	esy the equity of			Apply
	Router Reg Email address Password	pistration			-	Apply
	Email address Password	i parantal sentros po pistration s			3	Apply ster Router
	Email addres Password Device Info	r galantiki optitrita po pistration s			3	
	Email address Password	patential controls po pistration s mation Device name	MAC address		3	
	Email addres Password Device Info	s srmation (unknown)	8887179CB79	F	3	
	Email addres Password Device Info	patential controls po pistration s mation Device name		F 33	3	

- 6. In the Router Registration section, enter your email address and click **Register Router**. After registration takes place, open the confirmation that was sent to your email address. Follow the instructions in the email to confirm your registration of Parental Controls. Parental Controls are activated about fifteen minutes after you confirm your registration.
- 7. On the Policy Management screen, enter your password and click Login.

WD Internet Security Policy Management	/ & Parental Control
Please sign in.	
Login Name (email):	caelab@yahoo.com
Password:	••••••
	Login
v 💮 NetSTAR	B SoutSTAP Ins. All typis Reserves, VIC is a unplaned subserves. If United Digital all styles reverses.
	Please sign in. Login Name (email): Password:

8. The main Parental Controls screen displays.

wall	Internet Se	curity & Parental Co	ntrols	
Z D Filter	Enable parent	tal control	On	
rental Controls	Device locatio	'n	USA -	
				Apply
	Router Reg	istration		
	Email address		caelab@yahoo.com	
	Email address	s	Cathab gyanoo.com	
	Registration Sur Please follow th Parental Control This router is reset to	ccessfull You will recieve a re e URL link in the email to co is will be activated 5 minutes gistered for internet Security factory or reset from NetSta	spistration confirmation email. Infirm your registration of Parental Controls. after you confirm your registration. & Parental Control. The button the password	
	Registration Sur Please follow th Parantai Contro This router is reset to Device Info	ccessfull You will recieve a re e URL link in the email to co is will be activated 5 minutes gistered for internet Security o factory or reset from NetSta prmation	njstration continuation email. Infim you registration of Parental Controls. aller you confirm your registration. & Parental Control. The button, the password server	Re-register Router
	Registration Sur Please follow th Parental Control This router is reset to	ccessfull You will recieve a re e URL link in the email to co is will be activated 5 minutes gistered for internet Security factory or reset from NetSta	spistration confirmation email. Infirm your registration of Parental Controls. after you confirm your registration. & Parental Control. The button the password	
	Registration Sur Please follow th Parantal Control This router is reset to Device Info	ccessfull You will receive a re te URL link in the email to co will be advated 5 minutes gistered for internet Security lactory or reset from NetSta rrmation Device name	opidation confirmation email. Iffen you conjustation of Parental Controls, after you confirm your registration. It Parental Control. The buffon, the password sarver. MAC address	

- 9. In the Device Information table, select the devices you want to register for parental controls.
- 10. Click Register Device (at bottom of screen).
- 11. Click the **WD Internet Parental Controls Policy Management** link in the middle of the page to launch the Device List View screen.

Managing Parental Controls

The Device List View screen enables you to manage parental controls on a master, device, and time range level.



User Information

On the Device List View screen, click **UserInfo** to display the User Information Setting screen.

WD	WD Internet Security & Parental Control User Information Setting
	Back to Device List View
	User name
	MyNetN750_0090A9A5764A
	Password
	Current password
	New password
	New password [confirm]
	Password reset information
	Password reset question what is your e-mail?
	Password reset answer
	caelab@yahoo.com
	Confirm

- 1. (Optional) Update the **User name**, **Password** and **Password reset** information as desired.
- 2. Click **Confirm** to return to the Device List View screen.

Safe/Block List Setting

The Safe/Block List Setting enables you to enter up to 60 URLs and designate them as safe or blocked. The safe/block list overrides any of the categories listed in the time block. These are master settings, so they affect all devices on your network that have been registered for parental controls.

1. On the Devices List View screen (see page 58), below **Master Setting**, click **Safe/Block**. The Safe/Block List displays.

Back to Device List View				
Back to Device List view				
Device Name	Safe/	Block List (max 60)		
Master Setting	The input of a protocol is not neces	put of a protocol is not necessary.	Revert	Save
	No.	URL	Туре	Remove
		http://	Safe Block	
		http://	Safe Block	
		http://	Safe Block	×
		http://	🔵 Safe 🔵 Block	×
		http://	Safe Block	×
		http://	Safe Block	- 💌
		http://	Safe Block	
	8	http://	🔵 Safe 🔵 Block	
		http://	🔵 Safe 🔵 Block	×
	10	http://	Safe Block	

- 2. Enter the URLs of sites to which you want to control access and select either **Safe** or **Block**.
- 3. Click **Save**. The Device List view appears.

Time Block

The Time block enables you to filter web sites by time range. The web filtering levels include:

- All Blocks all web access regardless of category.
- Maximum Protects against social networks, video, and games. Includes all lower level blocks.
- High Protects against dating and all adult-related content. Includes all lower level blocks.
- Medium Protects against gambling, alcohol, and tobacco content. Includes all lower level blocks.
- Moderate Protects against occult, illegal acts, and advocacy. Includes all lower level blocks.
- **Low** Protects against pornography and hard core adult content.
- None Does not provide blocking; allows all web access.

The default setting is **Low**.

1. On the Device List View screen (see page 58), below **Master Setting**, click **Time Block** to display the Time Block Policy Setting screen.

Time Block Policy Setting					
Back to Device List View					
Device Name	Time Block Po	icy Table			Sav
Master Setting		:00~:15	:15~:30	:30~:45	:45~:59
Add Time Block	12 AM	Low	Low	Low	Low
Add Time Block	1	Low	Low	Low	Low
Time Range	2	Low	Low	Low	Low
	3	Low	Low	Low	Low
From 12 · : 00 · AM ·	4	Low	Low	Low	Low
To 12 😔 : 00 📀 AM 📀	5	Low	Low	Low	Low
	6	Low	Low	Low	Low
Filtering Level (i)	7	Low	Low	Low	Low
All - blocks all web access	8	Low	Low	Low	Low
Maximum	9	Low	Low	Low	Low
🔿 High	10	Low	Low	Low	Low
Medium	11	Low	Low	Low	Low
Moderate	12 PM	Low	Low	Low	Low
Low		Low	Low	Low	Low
	2	Low	Low	Low	Low
None		Low	Low	Low	Low
Update >>	4	Low	Low	Low	Low
	5	Low	Low	Low	Low
	6	Low	Low	Low	Low
		Low	Low	Low	Low
	8	Low	Low	Low	Low
	9	Low	Low	Low	Low
	10	Low	Low	Low	Low
	11	Low	Low	Low	Low

2. Select the **Time Range** and the **Filtering Level** it should apply to. By default, the screen shows a 24-hour range (12 A.M. - 12 A.M.); you can adjust the range to your preferences. For example, you may want to block all web access from (8 A.M.- 5 P.M.).

- *Note:* Use the **Update** button to change the **Filtering Level** for the whole table. For example, if you click **Maximum** and then **Update**, the Time Block Policy table changes all times within the time range to **Maximum**. The filtering level affects the whole table if you set the time range from 12 A.M. - 12 A.M.
- 3. Click Save.

Managing at the Device Level

If you prefer to apply controls to selected devices rather than at the Master level, you can do that too.

- 1. On the Safe Block List Setting or the Time Block Policy Setting screen, click **Back to Device List View**.
- 2. Select a device in the Device Table and click the type of block (**Safe/Block** or **Time Block**) you want to apply.
- 3. Follow the same steps as you do for applying a block on a master level.
- 4. Click **Save**.

Changing Parental Control Settings Remotely

To access the WD Internet Security and Parental Control Policy Management utility remotely:

- 1. Type www.wdinternetsecurity.com in your browser's address field.
- 2. Log in using your parental control username (email) and password.

Changing the Administrator's Password

It is a good practice to change the administrator's password for accessing and managing the router.

To change the administrator's password:

1. Click the **Advanced Settings icon** and then the **Administrator** icon to display the Admin/Administrator screen.

Advanced Set	tings		× Close			
° (†]→ □	\bigcirc	+	€Ğ3 ⁺	ද
WAN Wir	eless	LAN				
은 Admin / Admin	istrator					
Administrator	Admin Passw	vord				
Time Settings	The 'admin' accour By default there is i	nt can access the manag no password configured	ement interface. The ad . It is highly recommende	min has read/write acc ed that you create a pa	cess and can change the password assword to keep your router secure	d. 9.
Firmware Update	Admin Passw	vord				
System	Please enter the sa	ame password into both	boxes for confirmation.			
Connection Check	Original Passwo	rd				
Registration	New Password					
Log	Verify New Pass	word				
Language						
Device Mode	Administratio	n				
	Enable HTTPS S	Server		Dff		
	Remote Mana	igement				
	Enable Remote	Management		Off		
	Remote Admin F	Port	8080			
		min Port can not be in th				
	Use HTTPS			Off		

2. Enter the new administrator's password in the **Password** and **Verify Password** fields and click **Save**.

Accessing Files Stored on an Attached USB Drive

To access files stored on an attached WD USB storage drive such as a WD Passport or My Book, you have two options:

- *Note:* For information on installation, see "Installing WD Software from the CD (Optional)" on page 18 or "Using a Browser for Setup (Windows or Mac)" on page 14.
- If you installed WD Quick View on your computer during setup, use the WD Quick View icon in the system tray of a Windows computer or the in the Menu bar of a Mac computer to select the storage device and display a menu of options.

Note: WD SmartWare provides online Help for its procedures.

Use your browser.

Using WD Quick View (Windows or Mac)

Once you install WD Quick View, you can use a shortcut to access your files and folders on an attached storage device.

Windows

- 1. Right-or left-click the WD Quick View icon 🚳 in the system tray to display a menu.
- 2. Move the pointer over or click to select your My Net router and display a submenu.

	About WD Quick View	
Open	MyNetN750 [MyNetN750]	•
Dashboard	[External USB]	,
Alerts	Verbatim_STORE N GO [External USB]	
Properties	Exit	

- 3. Select **Open** on the WD Quick View submenu.
- 4. The shares display in Windows Explorer:

Organize 🔻 Network and Sharing Center	View remote printers	11.7 ▼
	tim_STORE_N_GO_33	2, La
Music Pictures Videos		
💐 Homegroup		
Computer Local Disk (C:) DVD RW Drive (D:) N		
Network CAE-PC MRAD-W7HP64 MyNetN750		
Verbatim_STORE_I		

Mac

1. Click the WD Quick View icon in the menu bar to display a menu, and move the pointer over the name of your My Net Router to display a submenu.

	🔞 🕓 🕴 🛜 🔺 🐠 Fri 4:31 PM 🔍	•
	About WD Quick View	
Open	O MyNetN750 ►	•:
Dashboard Learning Center Shut Down Alerts Properties		
S/N: WNN420800055 Space Available: 0% Temperature Condition:OK Drive SMART Status:OK		•

- 2. Select Open.
- 3. If you are prompted for a username and password, enter the username and password that you created when you set up external storage. If a password was not created, select or enter **guest**. Click **Connect**.

***	Enter your name and password for the server "mynetn750".	
<u> </u>	Connect as: OGuest • Registered User	
	Name: wd_user	_
	Password: •••••	_
	🗌 Remember this password in my keychair	1
	Cancel	ct

4. Select the USB device to mount onto the Mac and click OK.

000	
***	Select the volumes you want to mount on "MyNetN750.local.":
	WD_My_Passport_0748_33
	Cancel

5. In Finder, the My Net router displays below Shared, and the name of your USB device displays in the right pane:

000	📃 MyNetN750	local	
		Q	
FAVORITES	Connected as: Guest		Connect As
All My Files	Name	 Date Modified 	Size
AirDrop	WD_My_Passport_0748_33	≜	
Applications			
Desktop			
Documents			
O Downloads			
Movies			
🎜 Music			
Pictures			
SHARED			
💭 MyNetN 📤			
💭 cae-win864			
mrad-w7p64			
mynetn750			
DEVICES			

6. To view all of the shares on the drive, double-click the name of your storage device.

Using a Browser (PC)

To access the files stored on a USB drive connected to the router, make sure that the drive was properly set up as described in "Setting Up External Storage" on page 25. After the setup is complete, access it through the network as follows:

Windows XP

 Click Start > Run and type \\mynetnXYZ, where XYZ is the router's model number. If the router's default name was changed from the default host name, substitute the new name. The folder that displays represents the external USB drive. Double-click the folder to access the drive.

Windows Vista/Win7

- 1. Click S> Start and in the Search programs and files box, type \\mynetnXYZ, where XYZ is the number of the router model. If the router's default host name was changed during setup, substitute the new name. The folder that displays represents the external USB drive.
- 2. Double-click the folder to access its contents.

Note: If a password was set on the router during storage setup, at the prompts, enter the username and the password that you created.

Setting up a Share (Mac)

To access the files stored on a USB drive connected to the router, make sure that the drive was properly set up as described in "Setting Up External Storage" on page 25. After the setup is complete, access it through the network by doing the following:

- 1. Click **Finder** and then on the menu bar, click **Go > Connect to Server**.
- 2. Type **smb://mynetnXYZ**, where **XYZ** is the number of the router model. If the router's default host name was changed during setup, substitute the new name. The folder that displays is the external USB drive.

000	
챘	Select the volumes you want to mount on "MyNetN750.local.":
<u> </u>	WD_My_Passport_0748_33
	Cancel

3. Click **OK** to mount the volume.

4. If you are prompted for a username and password, enter the username and password that you created when you set up external storage. If a password was not created, select or enter **guest**. Click **Connect**.

	Enter your n "mynetn750"	ame and password for the server ".
<u> </u>	Connect as:	○ Guest ● Registered User
	Name:	wd_user
	Password:	••••
	Remem	per this password in my keychain

Updating the Router's Firmware 🔗

Note: For best results, upload the firmware using a wired connection.

- 1. Click the Advanced Settings icon and then the Administrator icon.
- 2. Click the **Firmware Update** tab.

Advanced Settings						
	•)) [®]	⊒→⊒	0	+	දිටු*	8
WAN		LAN	Storage	Security	Additional Features	Admin
र Admin / Firn	nware Upd	ate				
Administrator Time Settings	Firmware	Update e new firmware for your router to i				
Firmware Update	To upgrade t				button. Once you have found the fi	le, click the Upload
	To upgrade to button to star Firmware	he firmware, locate the upgrade fi t the firmware upgrade. Information			button. Once you have found the fi	le, click the Upload
Firmware Update	To upgrade the button to star	he firmware, locate the upgrade fi t the firmware upgrade.	ile on the local hard	drive with the Browse	button. Once you have found the fi	le, click the Upload
Firmware Update System Connection Check Registration	To upgrade the button to star Firmware Current Fin Current Fin	he firmware, locate the upgrade fi the firmware upgrade. Information mware Version	ile on the local hard 1.00.30 Wed 22	drive with the Browse	button. Once you have found the fi	le, click the Upload
Firmware Update System Connection Check	Current Fin Current Fin Check Onli	he firmware, locate the upgrade fi the firmware upgrade. Information mware Version mware Date ne Now for Latest Firmware \	ile on the local hard 1.00.30 Wed 22	drive with the Browse l	button. Once you have found the fi	le, dick the Upload
Firmware Update System Connection Check Registration	Current Fin Current Fin Check Onli	he firmware, locate the upgrade fi the firmware upgrade. Information mware Version mware Date	ile on the local hard 1.00.30 Wed 22	drive with the Browse l	button. Once you have found the fi	le, click the Upload

To check for the latest firmware version:

- Click Check Now. The router searches the WD website for a new firmware file.
 If a new file exists, the latest firmware version and an Update Now button appear.
- 2. Click **Update Now** to begin the firmware update. A message informs you of how long the upload will take. Please wait while the firmware update is taking place.

To update from a file:

- 1. Locate the firmware file on the WD Support site at http://support.wdc.com and download it to your computer.
- 2. On the router screen, browse to the firmware file you saved and click **Open**. The file name displays in the browser field on the router screen.
- 3. Click **Upload**. A message says how long the upload will take. Please wait while the firmware update is taking place.

Important: Do not disconnect or turn off the router while the update is in process.

Restoring the Router to Factory Defaults

You may want to reset the router to how it was when you bought it. You have two options for restoring factory defaults: through the user interface or through the **Reset** button on the bottom of the router.

To use the user interface:

- 1. Click the Advanced Settings icon and then the Administrator icon.
- 2. Click the **System** tab.
- 3. Click **Reset** to the right of **Reset to Factory Default Settings**.
- 4. When a confirmation message displays, click **OK**.
- 5. Wait until the router reboots before using it.

To reset the router manually:

1. Press and hold the **Reset** button on the bottom of the router for at least 10 seconds. When the reset finishes, the Power LED blinks.

Important: Do not reboot the router or close the application while the update is taking place.

Rebooting the Router 🖰

WARNING! To avoid data loss, before rebooting, stop all network and read/write activities.

You can reboot the router two ways. If you are physically close to it, just press the **On/Off** button on the router. If you cannot easily press the button:

- 1. Click the Advanced Settings icon and then the Administrator icon.
- 2. Click the **System** tab.

Advanced Se	ettings		× Close				
* *		B→B	0	•	ද්දුයු දුරු	8	
WAN W							
유 Admin / Syster	m						
Administrator		estore Settings					
Time Settings	Once the router is configured, you can save the configuration settings to a configuration file on your computer. You also have the option to load configuration settings, or restore the factory default settings.						
Firmware Update							
System	Save settings	to a file.		Save Configurat	tion		
Connection Check	Restore Setti	ngs from a File			Browse		
Registration	rtestore setti	Restore Settings from a File Restore Configuration					
Log				rtestore Conligui			
Language	Reset to Fact	ory Default Settings		Reset			
Device Mode	Reboot the ro	uter					
	- Hoboot ine h			Reboot			
	Logout						
© 2012 Western Digital All rights reserved.	Logout			Logout			

3. Scroll to the bottom of the screen and click **Reboot**.

Using the Router as an Access Point 🖰

You can use your My Net router as an extender or access point (AP). Extender mode can:

- Add wireless coverage to a home network without wireless coverage.
- Expand a home network's wireless coverage.

Note: To use the router in extender mode, the router must be connected by wire to your computer.

To convert the router to extender mode:

- 1. Click the Advanced Settings icon and then the Admin icon.
- 2. Click the **Device Mode** tab. The LAN Connection Type displays.
- 3. From the **Device Mode** drop-down list, select **ExtenderMode** (wired **AP**). The **LAN Connection Type** displays.

Advanced	Settings		× Close			
	•))	⊒→⊒	0	•	€ <u>6</u> 3•	8
WAN						
A Admin / Dev Administrator Time Settings Firmware Update System	Device M	is device to operate in Route		: Mode (wired AP) 🗟		
Connection Check Registration Log	LAN Conne	ection Type	Dynamic	IP (DHCP)	Cancel	Save
Language Device Mode						

- 4. To configure **LAN Connection Type**, select **Dynamic IP (DHCP)** (default) or **Static IP**, complete the required fields, and click **Save**. (See "" on page 53 for details.) The screen informs you of how long the process will take. The router reboots, and the login screen displays.
 - *Note:* The IP address of your extender is the static IP you assigned or the DHCP IP address assigned by your main router.

Setting up the DHCP Server on the My Net Router _→_

You can use your router as a DHCP server that assigns IP addresses to other components of your network.

To set up a DHCP Server on My Net Router:

- 1. Click the Advanced Settings icon and then the LAN icon.
- 2. Click the **DHCP Server Settings** tab.

Advanced S	ettings		× Close			
	•))	⊒→⊒	0	•	€Ĝ3 ⁺	ጽ
WAN		LAN				
Lan / DHCP \$						
		erver is used to provide the			ally. The configuration here is for t	
DHCP Server Settings	The DHCP server in the	erver is used to provide the	working in the router mo	de. There should be o	ally. The configuration here is for t nly one DHCP server each networ	
DHCP Server Settings	The DHCP server in the	erver is used to provide the LAN site when the device is erver if there is already anot	working in the router mo	de. There should be o		
DHCP Server Settings	The DHCP so server in the the DHCP se Enable DHC	erver is used to provide the LAN site when the device is erver if there is already anot	s working in the router mo her DHCP server in your n	de. There should be o etwork.	nly one DHCP [°] server each networ	
DHCP Server Settings	The DHCP so server in the the DHCP se Enable DHC	erver is used to provide the LAN site when the device is erver if there is already anot CP Server ddress Range	s working in the router mo her DHCP server in your r	de. There should be o etwork.		
Host and Lan Settings DHCP Server Settings Device and Client Tables	The DHCP so server in the the DHCP so Enable DHC DHCP IP Ac	enver is used to provide the LAN site when the device is enver if there is already anot CP Server ddress Range ain Name	s working in the router mo her DHCP server in your n	de. There should be o etwork.	nly one DHCP [°] server each networ	
DHCP Server Settings	The DHCP so server in the the DHCP se Enable DHC DHCP IP Ac Local Doma	enver is used to provide the LAN site when the device is enver if there is already anot CP Server ddress Range ain Name	working in the router mo her DHCP server in your n On 192.168	de. There should be a etwork.	nly one DHCP [°] server each networ	

- 3. Enable **DHCP server** (**On** by default) and click **Save**.
- 4. Configure **DHCP IP Address Range**. By default the range is IP address 192.168.1.100 to IP address 192.168.1.149.
- 5. (Optional) Set a **Local Domain Name**.
- 6. Set the **DHCP Lease Time** (hours) and click **Save**.
- 7. Connect all the client devices.

8. Click the **Device and Client Table** tab. The table lists all of the client devices (wired/ wireless) and displays the number of devices connected along with the IP address and MAC address of each device.

	•))	⊒→	<mark>_</mark> (0)) (+)	දිටු•්	8
WAN						
🗝 LAN / Device	e and C	lient Table	es			
7						
Host and LAN Settings	DHC	P Client Table				
DHCP Server Settings		Wireless Devices				
Device and Client Ta		IP Address	MAC Address	Device Name	Lease Time	
	1		00:25:4b:c6:00:b6	(unknown)	6 day 23 hr 26 min 4 se	20
	2		00:24:36:95:ed:2d	Dicks-iPod	6 day 20 hr 45 min 36 s	
	3		00:26:4a:91:9a:5e	Jessicas-iPod	6 day 22 hr 6 min 10 se	
	4	192.168.1.102	00:13:72:7e:2a:1c	bernstein-seven	6 day 23 hr 0 min 0 sec	:
	5	192.168.1.103	40:a6:d9:68:72:90	iPhone-Ralf-4G	6 day 23 hr 47 min 16 s	sec
	Manu	ual Added Devid	ce			
	IP Add	draca				
	MAC	Address				
	Devic	e Name				
				Add/Update		

To manually assign a device a DHCP IP address:

Advanced	Setting	5	× Clo	se		
\oplus°	•	₽→	<mark>ല</mark> ()	•	ද ිලි	ዶ
			4 Storage			
LAN / Devic	e and C	lient Tabl	es			
Host and LAN Settings	DHC	P Client Table				
DHCP Server Settings	Wired	//Wireless Devices				
Device and Client Ta	bles #	IP Address	MAC Address	Device Name	Lease Time	
	1	192 168 1 130	00 13 72 7e 2a 1c	bernstein seven	6 day 23 hr 55 min 40) sec
	i. Second					
	Man	ual Added Devi	ce			
	IP Ad	dress	1			
	MAG	Address				
	Devic	e Name				
				Add/Update		
	#	IP Address	MAC Address	Device Name		
	1	192,168,1,131	00.13.72.7e.2a	1d New Device	a	

- 1. In the Manual Added Device section of the screen, enter the device's IP address, MAC address, and device name.
- 2. Click Add/Update. The device information populates the device table below.
- 3. To update a device, select it in the table and click the **Edit** icon. Edit the information and click **Add/Update**.
- 4. To delete a device, disconnect it, select it in the table, and click the **Delete** (trash can) icon.

Note: For more information, search for refer to KBA Answer ID 9423 on the Support website at *http://support.wdc.com.*

Configuring UPnP 👸

UPnP enables networked devices to discover each other and start working together on a network.

To enable UPnP:

- 1. Click the Advanced Settings icon and then the Additional Features icon.
- 2. Click the Network UPnP tab.

Advanced	d Settings		× Close			
	•)) [®]	⊒→⊒	0	•	දයු දියු	S
		LAN			Additional Features	Admin
le Advance /	Network UF	PNP				
Port Forwarding	UPNP Universal PI	ug and Play(UPnP) supports	peer-to-peer Plug and F	Play functionality for net	vork devices.	
Routing	Enable UP	nP IGD	On			
FasTrack QoS Network UPNP					Cancel	Save
0 2012 Western Digital. All rights reserved.						

- 3. To enable UPnP, toggle the UPnP IGD button to On. (UPnP is enabled by default.)
- 4. Click Save.

Enabling Port Forwarding

On a private network, port forwarding maps Internet traffic coming into a specific port to a specific device on your LAN like a web server. Port forwarding is useful, for example, when you host a game to which others want to connect. Instead of their being blocked because of the router's network address translation (NAT), port forwarding allows their information to come through.

To create port forwarding rules:

- 1. Click the Advanced Settings icon and then the Additional Settings icon.
- 2. Click the **Port Forwarding** tab.

(N600/N750)

ش	•))	⊒→⊒	0	+	€©‡	ጽ
WAN					Additional Features	Admin
Advance / I	Port Forwar	ding				
Port Forwarding	Port Forwa					
ALG	network. This !	eature allows you to ente		al end port, and intern	data through those ports to a s al start port in the fields. The in	
Routing FasTrack QoS		arding Rules				
Network UPnP	Remaining nu	mber of rules that can be	created: 32		Cance	el Save
	Enabled	Name	Applica	tion Name 🔗	External Port Range	Protocol All
		IP Address	Compu	ter Name 📀	Internal Port Range	
	Enabled	Name	Applica	tion Name 🔗	External Port Range	Protocol All
		IP Address	Compu	ter Name 🛛 👻	Internal Port Range	
		Name	Applica	tion Name 🔷 👳	External Port Range	Protocol

(N900)

Port Forwarding	Port Forwarding						
NLG	This option is used to oper network. This feature allow generated automatically. Th	you to enter extern	nal start port, external e	nd port,	and internal start port		
Routing							
asTrack Plus QoS	Port Forwarding Ru Remaining number of rules		d: 32				
inhanced WMM						Cancel	Save
letwork UPnP					External Port Range		
	Name		Application Name	~		Protocol All	
	Enabled						
	IP Address		Computer Name		Internal Port Range		
	Name	_	And Real Real Manual		External Port Range	Protocol	
	Enabled		Application Name	~		All	
	Enabled				Internal Port Range		

3. Enter the following information for each port forwarding rule you create:

Port Forwarding Rules	
Enabled	Select the check box to enable the port forwarding rule. Clear the check box to disable.
Application Name	From the drop-down list, select the application whose data you want to forward to the client on your local network. Click the double arrows to populate the Name, Internal Port, External Port and Protocol fields.
External Port Range	Enter the port(s) you want to forward from the WAN interface (Internet). The port is automatically populated when you pick an application from the drop-down list.
Protocol	Select the protocol that you wish to port forward. The options are All, TCP, and UDP. The protocol will be automatically be selected if you pick an application from the drop-down list.
IP Address	Can be manually entered or populated by your selection from the Computer Name drop-down list.
Computer Name	Device on your local network to which the rule will be applied. Click the double arrows to populate the IP Address field.
Internal Port Range	Enter the port(s) on the LAN client to which you want to forward data. The port is automatically populated when you pick an application from the drop-down list.


4. Click **Save** at the top or bottom of the page.

Accessing My Net View

Once you install My Net View on your computer, you can use it to diagnose network problems.

To access My Net View:

1. Double-click the **My Net View** icon on your Desktop. The My Net View Welcome page displays.



2. Click **Diagnose**, and use the online Help (?) to guide you through the diagnostic procedures.

7

Installing and Using WD Print Share

Your My Net router can share a printer, a multi-function printer, or a scanner with computers on your network. Just connect the printer/scanner to an available USB port on the router, install the printer/scanner manufacturer's software, and then install WD Print Share software on each computer that will share the printer/scanner.

This chapter contains the following topics:

Installing WD Print Share (Windows) Using WD Print Share

Installing WD Print Share (Windows)

Before installing WD Print Share software, make sure the manufacturer's printer/scanner driver and software are installed in your computer.

- 1. Connect the USB printer/scanner to any available USB port on the back your router.
- 2. Insert the Setup & Resource CD into your computer's CD drive. If the setup screen doesn't start automatically, open the CD and double-click **EasySetup.exe**.
- 3. If you have already set up your router, click Skip and go to software installation.
- 4. Select **WD Print Share** and click **Next** to start installation.
- 5. When the installation is done, open the WD Print Share icon on the desktop.

System • Tool •	2
Server	Status
Server	Status Auto-Connecto

6. Make sure the status is Auto-Connected or Connected. You are now ready to print.

Using WD Print Share

Using an Auto-Connected Printer

By default, the printer is in **Auto-Connected** mode, which allows the computer to be connected to the printer only when you send a print job to the printer. Another user in the network can use the printer while you are disconnected.

Using the Connect Button

Connected mode is for both printing and scanning. Selecting the printer or scanner and clicking **Connect** manually connects the device to your computer for the timeout duration set in **Tool > Set Timeout** in the menu.

Using the Connect Button With a Scanner

- 1. Select the scanner from the list on the WD Print Share Control Center.
- 2. Click Connect. The status changes to Connected.
- 3. Launch the software that came with your scanner.
- 4. After the scanning job is done, disconnect by clicking **Disconnect** or let the scanner disconnect automatically in the predefined time set in **Tool > Set Timeout** in the menu.

Using the Scan Button

You can also use the **Scan** button on the WD Print Share Control Center to activate scanning with the industry standard TWAIN or WIA interface.

- 1. Select the scanner from the list on the WD Print Share Control Center.
- 2. Click **Scan**. You are prompted to select a scanner interface. A scanner user interface appears on the screen.
- 3. Choose options and click **Scan** to scan your picture or document.
- 4. After scanning is done, click **Close**.



Troubleshooting

Problem	Solution
The power LED does not illuminate.	 Ensure that the power cord is correctly connected to the router. Ensure that the electrical outlet is working properly. To do this, plug a different electronic device into the outlet and try to power it on. Ensure that you are using the AC adapter provided with the router.
A port number LED does not illuminate.	 Ensure that the connected device is powered on. Ensure that the Ethernet cable(s) are securely connected to the ports on both the device and the router. To ensure that the cable between the router and the electronic device is working properly, replace it with another cable.
Computers are unable to access the Internet.	 Ensure that the router is powered on. The power LED should be solid and not flashing. Check the cable connections between the modem, router and computer. The Ethernet cable connected to your modem should be connected to the Internet port on the router. An Ethernet cable from your computer should be connected to a LAN port on the back of the router. Power off and power on your modem, router, and computer. If all else fails, install My Net View from the product CD or contact Technical Support at <i>http://support.wdc.com</i> or your ISP.
(For My Net N900 only) All front panel LEDs flash continuously.	 Relocate your router to a place that has good ventilation. Turn off your router, and set it aside for 15 to 20 minutes until it cools down. Turn your router back on to resume operation. If the problem persists, contact Technical Support at http://support.wdc.com.

Regulatory and Warranty Information

This chapter contains the following topics:

Regulatory Compliance Warranty Information (All Regions Except Australia/New Zealand) Warranty Information (Australia/New Zealand only) Environmental Compliance (China)

Regulatory Compliance

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Regulatory Information/Disclaimers

Installation and use of this Wireless LAN device must be in strict accordance with the instructions included in the user documentation provided with the product. Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment. The manufacturer is not responsible for any radio or television interference caused by unauthorized modification of this device, or the substitution of the connecting cables and equipment other than manufacturer specified. It is the responsibility of the user to correct any interference caused by such unauthorized modification, substitution or attachment. Manufacturer and its authorized resellers or distributors will assume no liability for any damage or violation of government regulations arising from failing to comply with these guidelines.

For operation within $5.15 \sim 5.25$ GHz frequency range, it is restricted to indoor environment. This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

9

CAUTION: To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: The country code selection is for non-US models only and is not available for all US models. Per FCC regulations, all WiFi products marketed in the US must be fixed to US operation channels only.

Industry Canada (IC)

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Ce dispositif est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

CAUTION! The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

AVERTISSEMENT! Les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

Radiation Exposure Statement: This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

Déclaration d'exposition aux radiations: Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

ICES-003/NMB-003 Statement

Cet appareil numérique de la classe B est conforme à la norme ICES-003 du Canada.

This device complies with Canadian ICES-003 Class B.

This product is intended to be supplied by a listed limited power source, double insulated, or direct plug-in power unit marked "Class 2."

Safety Compliance

Approved for US and Canada. CAN/CSA-C22.2 No. 60950-1, UL 60950-1: Safety of Information Technology Equipment.

Approuvé pour les Etats-Unis et le Canada. CAN/CSA-C22.2 No. 60950-1, UL 60950-1: Sûreté d'équipement de technologie de l'information.

This device is only for use with the compatible UL Listed AC adapter.

Cet appareil n'est destiné qu'a` des adaptateur compatibles marqués "UL Listed".

以下警語適用台灣地區

經型式認證合格之低功率射頻電機,非經許可,公司、商號或使用者均不得擅自變更頻率、 加大功率或變更原設計之特性及功能。

低功率射頻電機之使用不得影響飛航安全及干擾合法通信;經發現有干擾現象時,應立即 停用,並改善至無干擾時方得繼續使用。前項合法通信,指依電信法規定作業之無線電通 信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

For Mexico Only

La operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

For Russia FAC DoC Only

For Brazil Only

Este equipamento opera em caráter secundário, isto é, não tem direito a proteção contra interferência prejudicial, mesmo de estações do mesmo tipo, e não causar interferência a sistema operando em caráter primário.

CE Compliance for Europe

Operation of this device is subjected to the following National regulations and may be prohibited to use if certain restriction should be applied.

Marking by the CE symbol indicates compliance of this system to the applicable Council Directives of the European Union, including the EMC Directives (2004/108/EC), (1999/5/EC), the Low Voltage Directive (2006/95/EC), and EuP Directive (2005/32/EC). A "Declaration of Conformity" in accordance with the applicable directives has been made and is on file at Western Digital Europe.

Die Kennzeichnung mit dem CE-Symbol zeigt an, dass dieses System die anwendbaren Richtlinien der Europäischen Union erfüllt, einschließlich der EMV-Richtlinien (2004/108/EG), (1999/5/EG), der Niederspannungsrichtlinie (2006/95/EG) und der Richtlinie (2005/32/EG) des Europäischen Parlaments. Eine "Konformitätserklärung" gemäß den anwendbaren Richtlinien wurde abgegeben und kann bei Western Digital Europe eingesehen werden.

Le symbole CE sur l'appareil indique la conformité de cet appareil avec les directives applicables du Conseil de l'Union Européenne, dont les directives EMC (2004/108/EC), (1999/5/EC), la directive sur les limites de tension (2006/95/EC) et la directive EuP (2005/32/EC), si applicable. Une « déclaration de conformité » conforme aux directives applicables a été effectuée et est consultable chez Western Digital Europe.

Il marchio CE indica la conformità del sistema alle direttive applicabili del Consiglio dell'Unione europea, tra cui le Direttive EMC (2004/108/CE), (1999/5/CE), la Direttiva Bassa Tensione (2006/95/CE), e la Direttiva EuP (2005/32/CE). Una "Dichiarazione di conformità" redatta in base alle direttive vigenti è disponibile presso Western Digital Europe.

La marca con el símbolo CE indica el cumplimiento de este sistema de las Directivas del Consejo de la Unión Europea correspondientes, incluidas las directivas EMC (2004/108/EC) y (1999/5/EC), la Directiva de bajo voltaje (2006/95/CE) y la Directiva EuP (2005/32/EC). Se ha realizado una "Declaración de conformidad" de acuerdo con las directivas aplicables y se encuentra archivada en Western Digital Europe.

CE-märkningen innebär att detta system uppfyller Europeiska Unionens tillämpliga rådsdirektiv, inklusive EMC-direktivet (2004/108/EC), (1999/5/EC), lågspänningsdirektivet (2006/95/EC) och EuP-direktivet (2005/32/EC). En "Konformitetsdeklaration" i enlighet med gällande direktiv har gjorts och finns arkiverad hos Western Digital Europe.

Merking med CE-symbolet indikerer at dette systemet samsvarer med gjeldende direktiver (council directives) for EU, inkludert EMC-direktiv (2004/108/EF), (1999/5/EF), Lavspenningsdirektiv (2006/95/EF) og EuP-direktiv (2005/32/EF). En "Samsvarserklæring" i henhold til gjeldende direktiver har blitt opprettet og er i Western Digital Europas arkiver.

CE-merkintä osoittaa tämän järjestelmän yhdenmukaisuuden sovellettavissa olevien Euroopan yhteisön neuvoston direktiivien kanssa, mukaan lukien EMC-direktiivi (2004/108/EC), (1999/5/EC), alijännitedirektiivi (2006/95/EC) sekä EuP-direktiivi (2005/32/EC). "Noudattamisjulistus" on jätetty asiaankuuluvien direktiivien mukaisesti, ja se on tallessa Western Digital Europessa.

Mærkning med CE-symbolet angiver at systemet overholder Europaparlamentets og Rådets direktiver, herunder EMC-direktiverne (elektromagnetisk kompatibilitet) (2004/108/EC), (1999/ 5/EC) og lavspændingsdirektivet (2006/95/EC) og EuP-direktivet 2005/32/EC. En "Declaration of Conformity" (overensstemmelsesattestering) i henhold til gældende direktiver er afgivet og opbevares hos Western Digital Europe.

Маркировка символом CE свидетельствует о соответствии настоящей системы положениям применимых директив Совета Европейского Союза, в том числе директив об электромагнитной совместимости (2004/108/EC, 1999/5/EC), директивы о низковольтном оборудовании (2006/95/EC) и директивы об устройствах, использующих электроэнергию (2005/32/EC). Заявление о соответствии положениям применимых директив, сделанное компанией Western Digital, находится в архиве её европейского подразделения.

Η σήμανση με το σύμβολο CE υποδεικνύει ότι το σύστημα αυτό συμμορφώνεται με τις ισχύουσες οδηγίες του Συμβουλίου της Ευρωπαϊκής Ένωσης, συμπεριλαμβανομένων των οδηγιών περί ηλεκτρομαγνητικής συμβατότητας (2004/108/EK), (1999/5/EK), της οδηγίας περί χαμηλής τάσης (2006/95/EK) και της οδηγίας του Ευρωπαϊκού Κοινοβουλίου (2005/32/EK). Έχει πραγματοποιηθεί μία «Δήλωση συμμόρφωσης», σύμφωνα με τις ισχύουσες οδηγίες και τηρείται στα αρχεία της Western Digital Ευρώπης.

. التميز بوضع الرمز CE إلى توافق هذا النظام مع توجيهات المجلس القابلة للتطبيق والخاصة بالاتحاد روبي، بما في ذلك توجيهات التوافقية الكهرومغناطيسية (EMC) (2004/108/EC) وتوجيهات الجهد ربي المنخفض (2006/95/EC) وتم وضع "إعلان المطابقة" وفقًا للتوجيهات القابلة للتطبيق وهو موجود في على Western Digital Europe.

Environmental Compliance (China)

产品中有毒有害物质或元素的名称及含量

1 88 1						
部件名称			有	有毒有害物质	或元素	
	铅	汞	镉	六价铬	多溴联苯	多溴二苯醚
机壳/机箱	Х	0	0	0	0	0
电路板组合 / 板卡	Х	0	0	0	0	0
电源变压器 / 电源供应器	Х	0	0	0	0	0
0: 代表此种部件的所有均质材料中所含的该种有毒有害物质均低于中华人民共和国信息产业部所颁布的《电子 信息产品中有毒有害物质的限量要求》(SJ/T 11363-2006)规定的限量。 X: 代表此种部件所用的均质材料中,至少有一类材料其所含的有毒有害物质高于中华人民共和国信息产业部所 颁布的《电子信息产品中有毒有害物质的限量要求》(SJ/T 11363-2006)规定的限量						
除非产品上另有标记,所有内附产品及其 环保使用期限只适用于产品手册中所规定 (在此表中、企业可能需要根据实际情况)。	的使用翁	杀件 。				

(在此表中,企业可能需要根据实际情况对标记"X"的项目进行进一步的技术性解释。)

Warranty Information (All Regions Except Australia/New Zealand)

Limited Warranty

WD warrants that the Product, in the course of its normal use, will for the term defined below, be free from defects in material and workmanship and will conform to WD's specification therefor. The term of your limited warranty depends on the country in which your Product was purchased. The term of your limited warranty is for 1 year in the North, South and Central America region, 2 years in the Europe, the Middle East and Africa region, and 3 years in the Asia Pacific region, unless otherwise required by law. The term of your limited warranty period shall commence on the purchase date appearing on your purchase receipt. WD may at its discretion make extended warranties available for purchase. WD shall have no liability for any Product returned if WD determines that the Product was stolen from WD or that the asserted defect a) is not present, b) cannot reasonably be rectified because of damage occurring before WD receives the Product, or c) is attributable to misuse, improper installation, alteration (including removing or obliterating labels and opening or removing external enclosures, unless the product is on the list of limited user-serviceable products and the specific alteration is within the scope of the applicable instructions, as found at http://support.wdc.com), accident or mishandling while in the possession of someone other than WD. Subject to the limitations specified above, your sole and exclusive warranty shall be, during the period of warranty specified above and at WD's option, the repair or replacement of the Product with an equivalent or better Product. The foregoing warranty of WD shall extend to repaired or replaced Products for the balance of the applicable period of the original warranty or ninety (90) days from the date of shipment of a repaired or replaced Product, whichever is longer.

The foregoing limited warranty is WD's sole warranty and is applicable only to products sold as new. The remedies provided herein are in lieu of a) any and all other remedies and warranties, whether expressed, implied or statutory, including but not limited to, any implied warranty of merchantability or fitness for a particular purpose, and b) any and all obligations and liabilities of WD for damages including, but not limited to accidental, consequential, or special damages, or any financial loss, lost profits or expenses, or lost data arising out of or in connection with the purchase, use, or performance of the Product, even if WD has been advised of the possibility of such damages. In the United States, some states do not allow exclusion or limitations of incidental or consequential damages, so the limitations above may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Obtaining Service

WD values your business and always attempts to provide you the very best of service. If this Product requires maintenance, either contact the dealer from whom you originally purchased the Product or visit our product support Web site at *http://support.wdc.com* for information on how to obtain service or a Return Material Authorization (RMA). If it is determined that the Product may be defective, you will be given an RMA number and instructions for Product return. An unauthorized return (i.e., one for which an RMA number has not been issued) will be returned to you at your expense. Authorized returns must be shipped in an approved shipping container, prepaid and insured, to the address provided on your return paperwork. Your original box and packaging materials should be kept for storing or shipping your WD product. To conclusively establish the period of warranty, check the warranty expiration (serial number required) via *http://support.wdc.com*. WD shall have no liability for lost data regardless of the cause, recovery of lost data, or data contained in any Product placed in its possession.

Warranty Information (Australia/New Zealand only)

For consumers purchasing products in Australia and New Zealand, please refer to this warranty information.

Nothing in this warranty modifies or excludes your legal rights under the Australian Competition and Consumer Act or the New Zealand Consumer Guarantees Act. This warranty identifies WD's preferred approach to resolving warranty claims which is likely to be quick and simple for all parties.

No other warranties either express or implied by law, including but not limited to those contained in the Sale of Goods Act, are made with respect to the Product. If you purchased your Product in New Zealand for the purposes of a business, you acknowledge and agree that the New Zealand Consumer Guarantees Act does not apply.

In Australia, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure. What constitutes a major failure is set out in the Australian Consumer Law.

Warranty

WD warrants that the Product, in the course of its normal use, will for the term defined below, be free from defects in material and workmanship and will conform to WD's specifications. The term of your warranty is 3 years in Australia and New Zealand, unless otherwise required by law. The term of your warranty period shall commence on the purchase date appearing on your purchase receipt from an authorized distributor or authorized reseller. Proof of purchase shall be required to be eligible for this warranty and to establish the commencement date of this warranty. Warranty service will not be provided unless the Product is returned to an authorized distributor, authorized reseller or regional WD return center where the Product was first shipped by WD. WD may at its discretion make extended warranties available for purchase. WD shall have no liability for any Product returned if WD determines that the Product was (i) not purchased from an authorized distributor or authorized reseller, (ii) not used in accordance with WD specifications and instructions, (iii) not used for its intended function, or (iv) stolen from WD, or that the asserted defect a) is not present, b) cannot reasonably be rectified because of damage occurring before WD receives the Product, or c) is attributable to misuse, improper installation, alteration (including removing or obliterating labels and opening or removing external enclosures, specific alteration is within the scope of the applicable instructions, as found at http://support.wdc.com), accident or mishandling while in the possession of someone other than WD.

PRODUCTS ARE COMPLEX AND FRAGILE ITEMS THAT MAY OCCASSIONALY FAIL DUE TO (A) EXTERNAL CAUSES, INCLUDING WITHOUT LIMITATION, MISHANDLING, EXPOSURE TO HEAT, COLD, AND HUMIDITY, AND POWER FAILURES, OR (B) INTERNAL FAULTS. SUCH FAILURES CAN RESULT IN THE LOSS, CORRUPTION, DELETION OR ALTERATION OF DATA. NOTE THAT YOU SHALL BE RESPONSIBLE FOR THE LOSS, CORRUPTION, DELETION OR ALTERATION OF DATA HOWSOEVER CAUSED, AND FOR BACKING UP AND PROTECTING DATA AGAINST LOSS, CORRUPTION, DELETION OR ALTERATION. YOU AGREE TO CONTINUALLY BACK UP ALL DATA ON THE PRODUCT, AND TO COMPLETE A BACKUP PRIOR TO SEEKING ANY GENERAL SERVICE AND TECHNICAL SUPPORT FROM WD.

In Australia, if the Product is not of a kind ordinarily acquired for personal, domestic or household use or consumption, provided it is fair and reasonable to do so, WD limits its liability to replacement of the Product or supply of equivalent or better Product.

This warranty shall extend to repaired or replaced Products for the balance of the applicable period of the original warranty or ninety (90) days from the date of shipment of a repaired or replaced Product, whichever is longer. This warranty is WD's sole manufacturer's warranty and is applicable only to Products sold as new.

Obtaining Service

WD values your business and always attempts to provide you the very best of service. Should you encounter any problem, please give us an opportunity to address it before returning this Product. Most technical support questions can be answered through our knowledge base or e-mail support service at http://support.wdc.com. If the answer is not available or, if you prefer, please contact WD at the applicable telephone number shown in the front of this document.

If you wish to make a claim, you should initially contact the dealer from whom you originally purchased the Product. If you are unable to contact the dealer from whom you originally purchased the Product, please visit our product support Web site at http://support.wdc.com for information on how to obtain service or a Return Material Authorization (RMA). If it is determined that the Product may be defective, you will be given an RMA number and instructions for Product return. An unauthorized return (i.e., one for which an RMA number has not been issued) will be returned to you at your expense. Authorized returns must be shipped in an approved shipping container, prepaid and insured, to the address provided with your RMA number. If following receipt of a qualifying claim under this warranty, WD or the dealer from whom you originally purchased the Product with an equivalent or better Product or refund the cost of the Product to you. You are responsible for any expenses associated with a claim under this warranty. The benefits provided to you under this warranty are in addition to other rights and remedies available to you under the Australian Competition and Consumer Act or the New Zealand Consumer Guarantees Act.

Your original box and packaging materials should be kept for storing or shipping your WD product. To conclusively establish the period of warranty, check the warranty expiration (serial number required) via http://support.wdc.com.

Western Digital Technologies, Inc. 3355 Michelson Drive, Suite 100 Phone: 949-672-7000 E-mail: support@wdc.com

GNU General Public License ("GPL")

Firmware incorporated into this product may include third party copyrighted software licensed under the GPL or Lesser General Public License ("LGPL") (collectively, "GPL Software") and not Western Digital's End User License Agreement. In accordance with the GPL, if applicable: 1) the source code for the GPL Software may be downloaded at no charge from http://support.wdc.com/download/gpl or obtained on CD for a nominal charge from http://support.wdc.com/download/gpl or by calling Customer Support within three years of the date of purchase; 2) you may re-use, re-distribute, and modify the GPL Software; 3) with respect solely to the GPL Software, no warranty is provided, to the extent permitted by applicable law; and 4) a copy of the GPL is included herewith, may be obtained at http://www.gnu.org, and may also be found at http://support.wdc.com/download/gpl.

Modification of or tampering with the Software, including but not limited to any Open Source Software, is solely at your own risk. Western Digital is not responsible for any such modification or tampering. Western Digital will not support any product in which you have or have attempted to modify the Software supplied by Western Digital.

Appendix: Technical Specifications

My Net N600/N750

Specificaton	My Net N600	My Net N750				
Ethernet	10/100 Fast Ethernet	10/100/1000 Gigabit Ethernet				
I/O ports	4 Ethernet (RJ-45) ports					
USB ports	(1) USB 2.0	(2) USB 2.0				
Supported operating	Windows XP with Service Pack 3	l				
systems	Windows Vista with Service Pack 2					
	Windows 7 with Service Pack 1					
	Mac OS X Leopard					
	Mac OS X Snow Leopard					
	Mac OS X Lion					
Supported	For PCs: IE7, IE8, and IE9					
browsers	For MACs: Safari (version 2 and above)					
	For PCs and MACs: Firefox (version 2.0 and above) and Google Chrome (version 7 and above)					
Physical dimensions	Length: 8.3" (219 mm)					
	Width: 5.4" (138 mm)					
	Height: 1.4" (35 mm)					
	Weight: My Net N600: 0.71 lb (0.32 Kg)	My Net N750: 0.75 lb (0.34 Kg)				
Power supply	Input voltage: 100V to 240V AC					
	Input frequency: 50 to 60 Hz					
	Output voltage: 12V DC, 2A					
	Power supply: 24W					
Temperature	Operating temperature: 5 to 35 °C	(41 to 95 °F)				
	Non-operating temperature: -20 to	65 °C (-4 to 149 °F)				

My Net N900

Ethernet	10/100/1000 Gigabit Ethernet					
I/O ports	(7) Ethernet (RJ-45) ports					
USB ports	(2) USB 2.0 ports Windows XP with Service Pack 3					
Supported operating	Windows XP with Service Pack 3					
systems	Windows Vista with Service Pack 2					
	Windows 7 with Service Pack 1					
	Mac OS X Leopard					
	Mac OS X Snow Leopard					
	Mac OS X Lion					
Supported browsers	For PCs: IE7, IE8, and IE9					
	For MACs: Safari (version 2 and above)					
	For PCs and MACs: Firefox (version 2.0 and above) and Google Chrome (version 7 and above)					
Physical dimensions	Length: 9.3" (237 mm)					
	Width: 6.1" (156 mm)					
	Height: 1.2" (30 mm)					
	Weight: 1.05 lb (0.48 Kg)					
Power supply	Input voltage: 100V to 240V AC					
	Input frequency: 50 to 60 Hz					
	Output voltage: 12V DC, 3A					
	Power supply: 36W					
Temperature	Operating temperature: 5 to 35 °C (41 to 95 °F)					
	Non-operating temperature: -20 to 65 °C (-4 to 149 °F)					

Index

Α

AC power adapters 6 accessing external USB storage 62 accessories 5 adding a wireless device 27 Additional Features screens 45 additional software 4 Admin screens 50 administrator password 62 Advanced LAN screens 38 Advanced Settings screens, components 30 advanced tasks 55 Advanced WAN (Internet) screens 31 Advanced Wireless screens 36 attached storage, accessing files on 62

В

back panels of routers 8 basic wireless settings, configuring 24 bottom 9 box contents 5 button Close 30 On/Off 14 Reset 9 WPS 27

С

CD, getting started with 10 changing admin password 62 closing an Advanced Settings screen 30 components 8 connecting to the Internet 23 current settings 20

D

dashboard icons 21
device not WPS enabled, connecting 27, 28
dual band speed 3

Е

Easy Setup for Windows computers 10 environmental compliance (China) 81 external storage, setting up 25

F

factory defaults, restoring 67 front panels of routers 6

G

getting started 10 GPL software 84 guest access 4, 55

I

icons, dashboard 21 installing the router 10 Internet connection 23

L

LEDs 7, 8

Μ

My Dashboard accessing after setup 19 accessing during setup 15 current settings 22 home page 19 My Net Software for Mac computers 18 My Net View accessing 73 description 4

0

obtaining service 82 obtaining service (Australia and New Zealand) 83 operating precautions 1

Ρ

package contents 5 parental controls 56 port forwarding 71 N600 and N750 45 N900 45 power adapters 6 product accessories 5 overview 3 registration 2 safety information 1 warranty 82 product information, recording 2

R

rebooting 67 registering the router 2 regulatory compliance 77 Reset button 9 restoring to factory defaults 67 RoHS 81 router as an access point 68 components 8 installation 11 USB ports 3 wired speed 3 wireless speed 3

S

safety instructions 1 screens Admin 50 Administrator 51 ALG 47 Connection Check 52 Device and Client Tables 39 Device Mode 53 DHCP Server Settings 39 DMZ screen 43 Dynamic DNS 35 Enhanced WMM (My Net N900) 49 FasTrack Plus QoS (My Net N900) 48 FasTrak QoS (My Net N600/N750) 47 Firewall 43 Firmware Update 52 Guest Access 38 Host and Lan Settings 39 Internet Security & Parental Controls 44 Internet status 31 IPv6 35 IPv6 Status screen 35 Language 53 Log 53 MAC Filter 43 Network UPnP 49 Port Forwarding 46 Registration 53 Routing 47 System 52 Time Settings 51 Wi-Fi Protected Setup (WPS) 38 Wireless Setup 37 service 82 service (Australia /New Zealand) 83 setting up a new router (PC) 11 settings advanced 30 basic 20 storage 25 setup Windows Vista/Win7 10

Windows XP 10 setup options 11 sharing a printer on the network 74 software, GPL 84 speed, wired 3 storage settings 25 USB 4

Т

tasks advanced 55 basic 20 troubleshooting 76

U

UPnP 71 USB storage 4

W

warranty 82 warranty, Australia/New Zealand 82 WD Print Share 4, 74 WD Print share installing 74 WD Print Share, using 75 WD Quick View accessing files on USB device 63 description 4 Wi-Fi Protected Security (WPS) 4 wireless adding devices 27 speed, simultaneous dual band 3 wireless device, connecting 27 wireless settings 24 WPS LED 7 WPS-enabled device, connecting 27

The wall mount system located at the bottom of the unit is not designed for general usage by the end user.

Information furnished by WD is believed to be accurate and reliable; however, no responsibility is assumed by WD for its use nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of WD. WD reserves the right to change specifications at any time without notice.

Western Digital, WD and the WD logo are registered trademarks in the U.S. and other countries; My Net is a registered trademark of Western Digital Technologies, Inc. Adobe and Adobe Reader and the included Adobe Reader logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Other marks may be mentioned herein that belong to other companies.

© 2012 Western Digital Technologies, Inc. All rights reserved.

Western Digital 3355 Michelson Drive, Suite 100 Irvine, California 92612 U.S.A.

4779-705072-A01 APR 2012